


hink

hink[®]

World Class Quality

**OXY-ONE
REFRIGERATION
PRODUCTS CO.,LTD.**

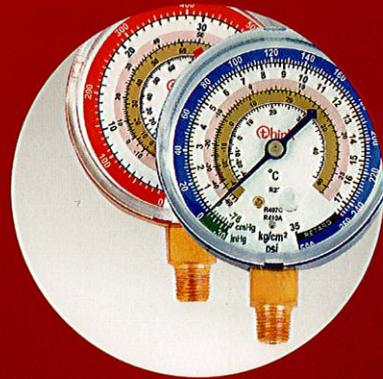

Contents 目录



15 REFRIGERANT GAUGES
冷媒表系列

think[®]
World Class Quality



01 COMPANY PROFILE
企业简介



17 TESTING MANIFOLDS
冷媒表组系列




30 SERVICE TOOLS
手工具系列



39 OIL SEPARATORS
油分离器系列




02 TUBE CUTTERS
切管刀系列

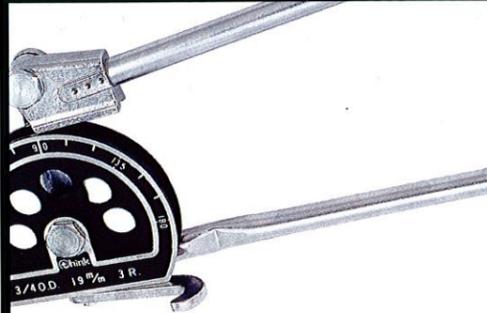

11 TUBE BENDERS
弯管器系列




23 SINGLE MANIFOLDS
冷媒单表组系列

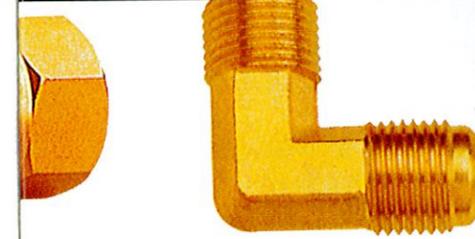

33 BRASS FITTINGS
铜配件系列




36 THERMOMETERS
温度计&仪表系列

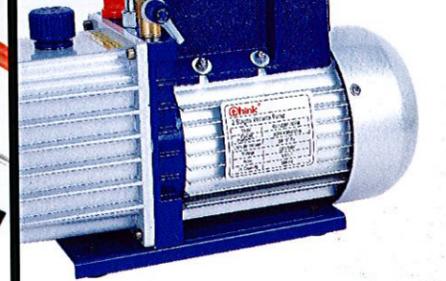

41 VACUUM PUMPS
真空泵系列




05 FLARING TOOLS
扩管器系列

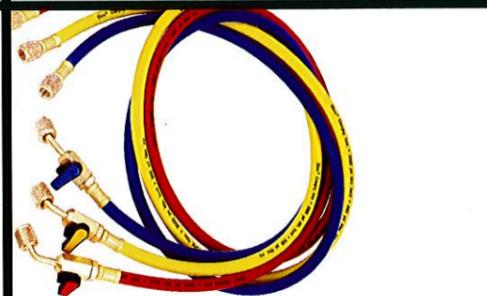

13 CHARGING HOSES
冷媒胶管系列



24 A/C REMOTE CONTROLLERS
遥控器系列

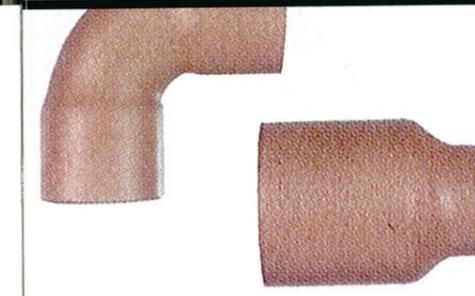

34 COPPER FITTINGS
紫铜配件系列




37 VIBRATION ABSORBERS
避震管系列



42 RECOVERY & CHARGING EQUIPMENTS
冷媒回收机系列



09 STANDARD EXPANDERS
胀管器系列

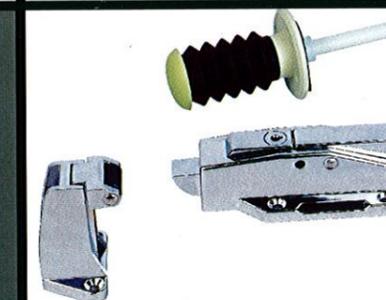

25 LATCHES & HINGES
库门把手 & 铰链系列



35 INFRARED THERMOMETERS
红外线测温仪系列



38 CAPACITORS
电容器系列

Company Profile

OXY-ONE Refrigeration Products Co., Ltd. head quarters is located in Malaysia known as OXY-ONE Alliance Sdn.Bhd., with strong technical strength combined with the expertise of an international enterprise. The company has set up a production base in China, which specializes in producing and manufacturing standard air-conditioning and refrigeration accessories tools set. We only use imported advanced technology, machinery and spare parts together with perfect workmanship to produce high standard and good quality product to create the company's brand "THINK". The brand has high reputation and is well known in the local as well as the overseas market. Our products are currently selling across Europe, America, Middle East and South East, Asia countries.

The company implements strict administration on quality control in the whole manufacturing process. The company's management vision "with quality to seek excellence, with reputation to seek expansion" together with its continuous research is aimed to provide our customers with the development of high-grade quality of product and service. We are constantly looking for opportunities to grow and co-operate with local or overseas clients to achieve mutual benefit.

永壹制冷配件(马来西亚)有限公司, 是一家拥有先进技术及优秀管理模式的外资企业。本公司采用进口原材料, 以精湛的制作工艺生产出系列高品质的制冷工具及配件产品, 并研发和申请了多项专利产品, 创立公司品牌“鼎美”, 享有很高的国际知名度, 产品远销欧美, 中东及东南亚地区。

本公司力求发展成具有国际竞争力及影响力的跨国企业, 凭着“以质量求生存, 以信誉求发展”的经营理念, 努力培养一批一流的员工队伍, 以一流的标准, 一流的工作, 一流的业绩塑造一流的企业形象。把我们的每一个成绩当作新的起点不断进行新的实践。

“没有最好, 只有更好”是我们的目标, 衷心希望能更好的服务于客户, 服务于社会, 在互惠互利的原则上共谋发展!

*To be the best, you have to have the best,
and to have the best you have to find best...*



For copper, brass, aluminum, thin-walled steel tubes as well as plastic coated tubes

0
6-42mm
1/4"~1-5/8"
OXY-109



OXY-108

LIGHT TELESCOPIC TUBE CUTTER

轻便型切管刀
For 1/4"~1-3/8"(6-35mm) O.D. Tubing
= Aluminium alloy body



- Quick adjustment of the working size
- Long service life
- space deburring blade
- Precise cut

OXY-109

STABLE TELESCOPIC TUBE CUTTER

稳速型切管刀
For 1/4"~1-5/8"(6-42mm) O.D. TUBING
= Zinc alloy body



For copper, brass, aluminum, thin-walled steel tubes as well as plastic coated tubes

Ø
6-67mm
1/4"~2-5/8"
OXY-206



OXY-206

RATCHET TELESCOPIC TUBE CUTTER

棘齿伸缩型切管刀

For 1/4" to 2-5/8" (6mm to 67mm) O.D. Tubing

- Quick adjustment
- Always within reach
- Aluminum alloy body

Improved spring loaded instant slide action feed is now simpler and stronger with heat treated components. The new stronger "I beam" design uses aluminum alloy for both strength and light weight. Wider body has longer rollers to hold tubing better and includes a flare cut off groove.


Contoured handle for better gripping also holds spare cutter wheel. Separate deburr tool slides into cutter body.



SERIES OF MIN-TUBE CUTTERS 迷你型切管刀系列

For copper, soft brass and aluminum tubing.

- Very small working radius
- Ideal for extremely tight places
- Fine thread screw provide easier tightening



OXY-327

Mini-TUBE CUTTER 迷你型切管刀

For 1/8"~5/8" (3-16mm) O.D. tubing
Zinc alloy body




OXY-328

HEAVY DUTY Min-TUBE CUTTER 迷你型切管刀

For 1/8"~7/8" (3-22mm) O.D. tubing
Zinc alloy body

For copper, brass, aluminum, thin-walled steel tubes

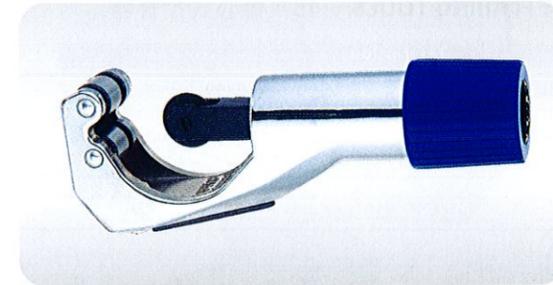


OXY-312

PREMIUM TUBE CUTTER 强力型切管刀

For 1/4"~1-5/8" (6-42mm) O.D. tubing
Aluminum alloy body
Chrome plated

- Enclosed hardened steel, thrust bearing feed mechanism for smoothest cutting and trouble free operation
- Unique design eliminates spiraling for clean right angle cuts. High precision machining and construction method permits one-piece screw type axle for easy access to cutting wheel - no dip to lose or replace

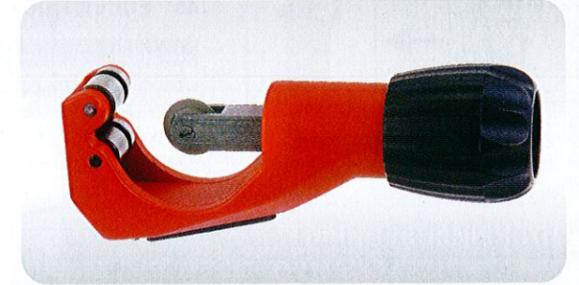

OXY-322

PREMIUM TUBE CUTTER 强力型切管刀

For 1/4"~1-5/8" (6-42mm) O.D. tubing
Aluminum alloy body
Paint surface

- Rugged aluminum alloy body designed for handling ease. Body is hand buffed and nickel chrome plated to a high luster finish
- Foldaway hardened steel reamer with turned cutting edge removes inside burrs cleanly. Filing surface removes outside burrs.
- All tube cutters are 100% factory tested to ensure spiral free cutting

OXY-274

HEAVY-DUTY TUBE CUTTER 快速型切管刀


For 1/8"~1-1/8" (3-28mm) O.D. tubing
Aluminum alloy body
Chrome plated



OXY-CTB-001

Cutting Blades 切管刀片

Cutting wheel from finest HSS high quality steel, hardened
For OXY-312/322/274/327 tube cutters

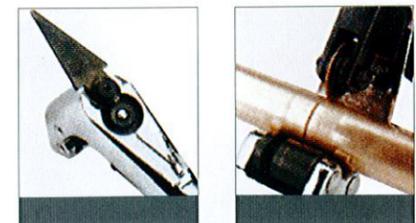


OXY-CTB-002

Cutting Blades 切管刀片

Cutting wheel from finest HSS high quality steel, hardened
For OXY-109/206/328 tube cutters


For soft tubing only—copper, aluminum, brass.



- High quality flares
- Special design for R410A system
- Easy operation, save time and energy

45° ECCENTRIC CONE TYPE FLARING TOOLS 45° 偏心式扩管器

Item No.	Description
OXY-806A410	For R410A system: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. tubing
OXY-808A410	For R410A system: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. tubing
OXY-808M410	For R410M system: 6mm, 8mm, 10mm, 12mm, 14mm, 16mm & 18mm O.D. tubing Packing in a color box



45° ECCENTRIC CONE TYPE FLARING TOOL KITS 45° 偏心式扩管器工具组

OXY-806AL410

- OXY-806A For 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing
- OXY-274 Heavy - duty tube cutter
- OXY-208 Inner-outer Reamer

OXY-808AL410

- OXY-808A For 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing
- OXY-274 Heavy - duty tube cutter
- OXY-208 Inner-outer Reamer

OXY-808ML410

- OXY-808M For 6mm, 8mm, 10mm, 12mm, 14mm, 16mm & 18mm O.D. Tubing
- OXY-274 Heavy - duty tube cutter
- OXY-208 Inner-outer Reamer



OXY-808AML410

- OXY-808A 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"
- OXY-808M For 6mm, 8mm, 10mm, 12mm, 14mm, 16mm & 18mm O.D. Tubing
- OXY-274 Heavy - duty tube cutter
- OXY-208 Inner-outer Reamer



OXY-525AM

OXY-525AM

UNIVERSAL 45° FLARING / BURNISH TOOL

45° 万能通用型扩管器

For soft tubing only—copper, aluminum, brass.

For 3/16" to 5/8" (5mm to 16mm) O.D. tubing
Universal designed bar will hold all inch and metric size tubing up to 5/8" (16mm)
Flare bar is more compact and easier to use in tight quarters.
Multi-faceted cone rolls out precise 45° flare and polishes it at the same time
Flare is formed above flare bar.



45° FLARING & BURNISHING TOOL 45° 新磨光型扩管器

Multi-faceted cone rolls a precise flare and simultaneously polishes it on brass, copper and aluminum

OXY-500A


- For 3/16", 1/4", 5/16", 3/8", 1/2" & 5/8" O.D. tubing.
- Packing in a color box.

OXY-500M

- For 6mm, 8mm, 10mm, 12mm, 15mm & 16mm O.D. tubing.
- Packing in a color box.



OXY-500A

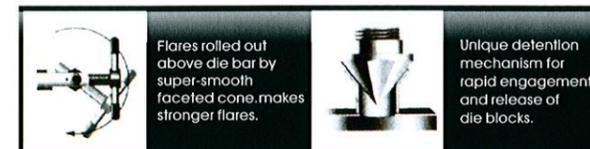


Flares rolled out above die bar by super-smooth faceted cone, makes stronger flares.

Unique detention mechanism for rapid engagement and release of die blocks.

HEAVY DUTY 45° FLARING & SWAGING TOOLS 45° 传统型扩管器

For soft tubing only—copper, aluminum, brass.
For 1/8" to 3/4" (3mm to 18mm) O.D. Tubing

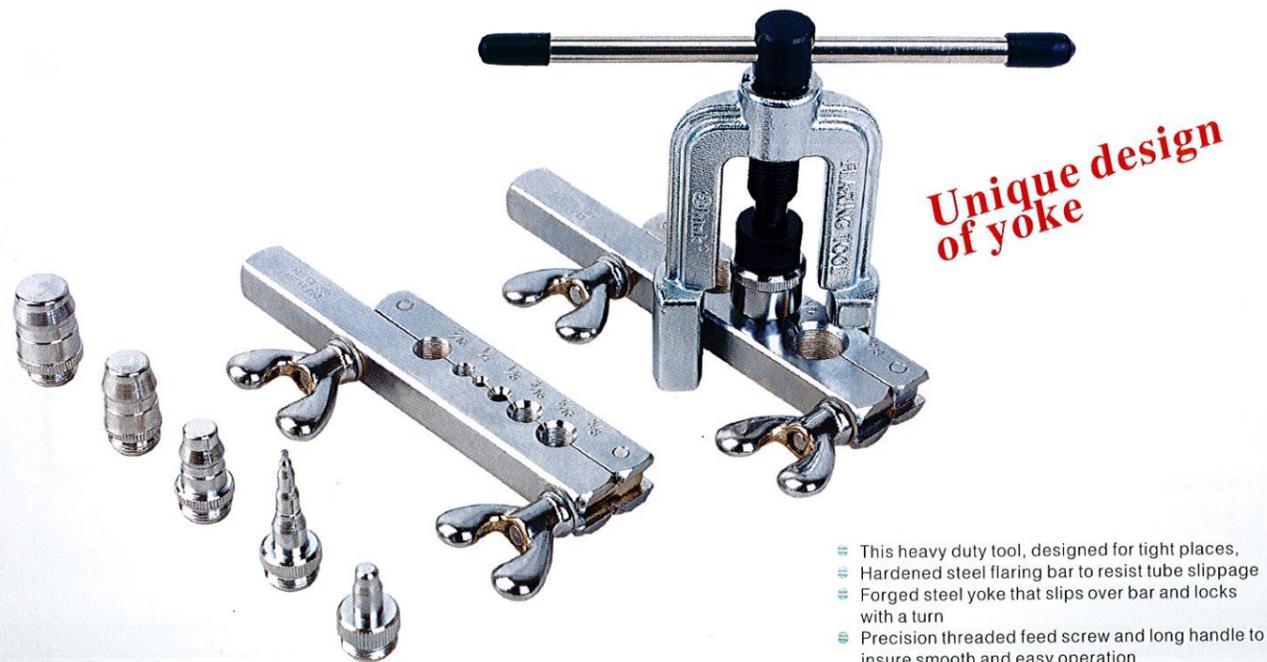

**Unique design
of yoke**

- This heavy duty tool, designed for tight places,
- Hardened steel flaring bar to resist tube slippage
- Forged steel yoke that slips over bar and locks with a turn
- Precision threaded feed screw and long handle to insure smooth and easy operation

OXY-275AL

45° FLARING & SWAGING TOOL KITS
45° 传统型扩管器工具组


- For soft tubing only—copper, aluminum, brass,
- For 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8" & 3/4" O.D. tubing
 - 5 Swage adapters for 3-in-1 (3/16"-1/4"-3/8"), 5/16", 1/2", 5/8" & 3/4" O.D. tubing.
 - The 45° cone for flare.
 - Packing in a plastic case.



45° COMMON FLARING TOOLS 45° 普通型扩管器

For soft tubing only—copper, aluminum, brass.

Item No.	Description
OXY-195A	For 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" & 5/8" O.D. tubing
OXY-195M	For 4mm, 6mm, 8mm, 10mm, 12mm, 14mm, 16mm O.D. tubing
OXY-196A	For 1/4", 3/8", 1/2", 5/8" & 3/4" O.D. tubing
OXY-196M	For 6mm, 10mm, 12mm, 16mm & 18mm O.D. tubing

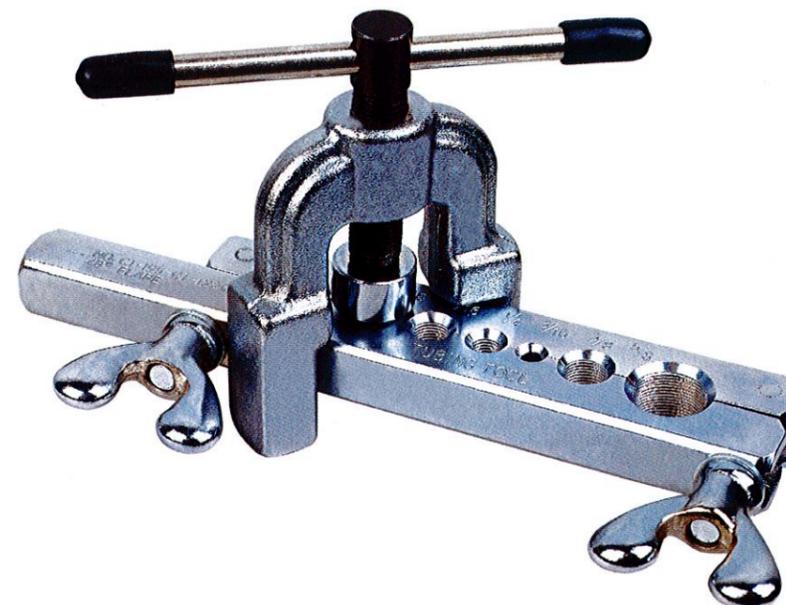

OXY-278AL

45° FLARING & SWAGING TOOL KITS
45° 传统型扩管器工具组

- For soft tubing only—copper, aluminum, brass,
- OXY-275AL 45° Flaring tool & 5 swage adapters.
 - OXY-274 Tube cutter 1/8" ~ 1-1/8" (3-28mm)
 - OXY-122 Ratchet wrench (1/4", 3/8", 3/16", 5/16")
 - Packing in a plastic case




OXY-1000H

STANDARD EXPANDER HANDLE 涨管器手柄

For expanding, reducing and re-rounding pipes of mild and semi-hard copper, aluminum and precision steel


Patent No: ZL 200820091808.5
ZL 200830101396.4

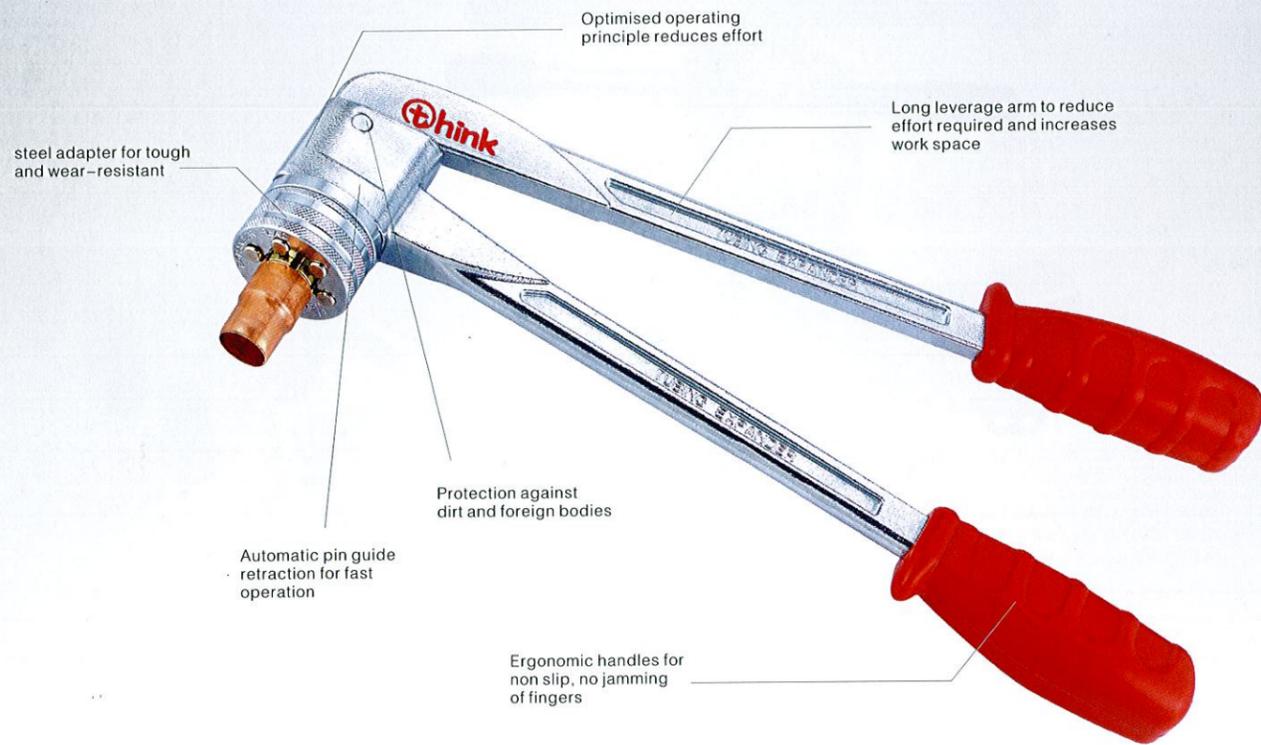

OXY-1000H




High quality wear protection, life-long precision

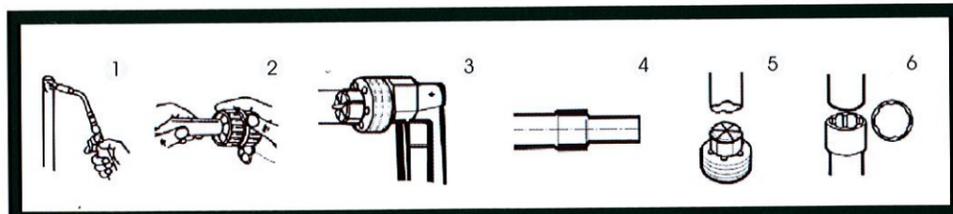

- 1 Use soft copper tube or anneal the tube part to be processed
- 2 Deburr tube inside and outside
- 3 Expand to maximum
- 4 Allow for tubes of different diameters
- 5 Deformed tubes can be calibrated
- 6 Guide ridges guarantee exact capillarity Use soft copper tube or anneal the tube part to be processed

STANDARD EXPANDER HEADS 优质标准涨管头

- OXY-1000E-3/8"
- OXY-1000E-1/2"
- OXY-1000E-5/8"
- OXY-1000E-3/4"
- OXY-1000E-7/8"
- OXY-1000E-1"
- OXY-1000E-1-1/8"
- OXY-1000E-1-3/8"
- OXY-1000E-1-5/8"

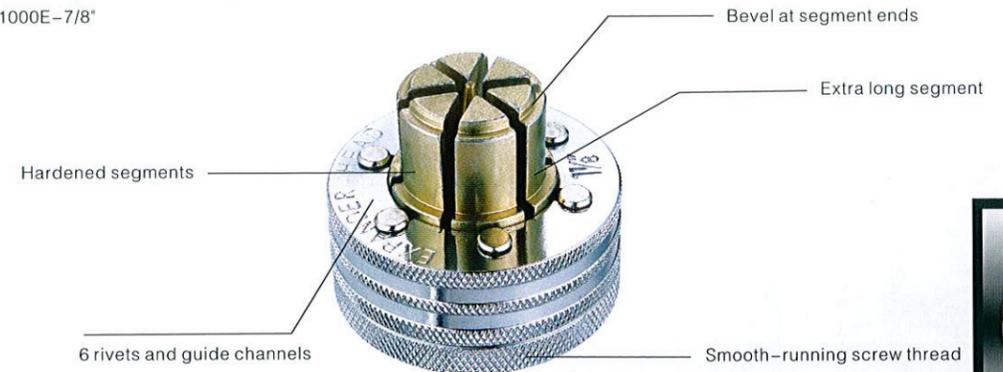

- Expander heads: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-3/8", 1-5/8" Optional
- Standard riveted expander heads fit similar expanders from other brands as well



OXY-1000AL



OXY-1000ATL

STANDARD EXPANDER TOOL KITS 标准涨管器工具组

OXY-1000AL

- Expander handle
- OXY-208 inner-outer reamer
- 6 sizes expander heads: 3/8", 1/2", 5/8", 3/4", 7/8" & 1"
- Packing in a red plastic case

OXY-1000ATL

- Expander handle
- OXY-208 inner-outer reamer
- 9 sizes expander heads: 3/8", 1/2", 5/8", 3/4", 7/8", 1-1/8", 1-3/8", & 1", 1-5/8"
- Packing in a red plastic case

For soft tubing only – copper aluminum, brass

OXY-369A

3-in-1 180° TRIPLE HEAD TUBE BENDER (180° 三合一弯管器)

For 1/4", 5/16" & 3/8" size O.D. tubing

- Aluminum alloy body, Bend radius 15/16" (24mm)
- Open size – slips on tubing at any point
- Can bend 0.5mm thin tube without distortion




OXY-102F

SPRING TUBE BENDERS 弯管弹簧系列

For 1/4" to 3/4" O.D. tubing

- Tools allow hand bending of soft tubing to any shape without collapsing walls
- Special spring steel, zinc finish
- End belled for quick tube removal

Item No.:	Tube O.D.	Length (in.)
OXY-102F-04	1/4"	10
OXY-102F-06	3/8"	10
OXY-102F-08	1/2"	12
OXY-102F-10	5/8"	12
OXY-102F-12	3/4"	12

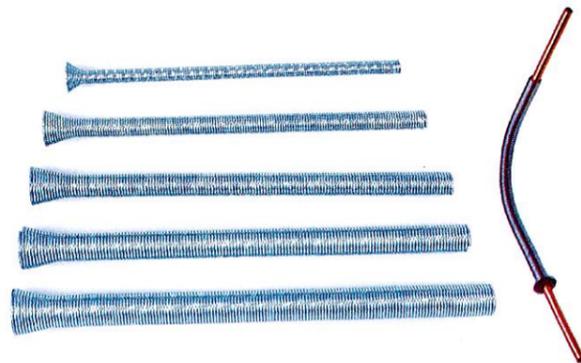

For soft tubing only – copper aluminum, brass

- Each tool bends one size
- Open side type over tube at any point
- Makes smooth, tight radius bends up to 18° with minimum effort
- No scoring or flattening of tubing
- Calibrated to show angle of bend
- Wide hook gripe tubing securely

SERIES OF LEVER TYPE TUBE BENDERS 杠杆型弯管器

OXY-364-04-1/4"

For 1/4" O.D. tubing
Bend radius: 14.2mm


OXY-364-06-3/8"

For 3/8" O.D. tubing
Bend radius: 24.0mm



OXY-364-08-1/2"


For 1/2" O.D. tubing
Bend radius: 38.0mm

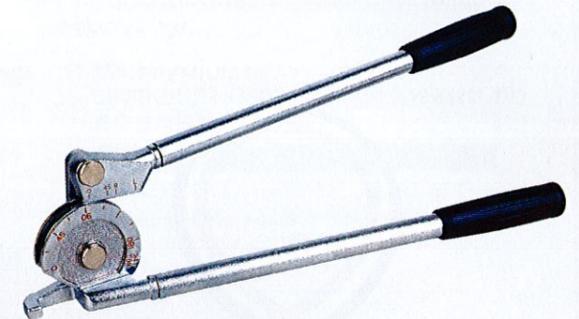

SERIES OF LEVER TYPE TUBE BENDER 杠杆型弯管器

OXY-364-10-5/8" & 16mm

For 5/8" O.D. tubing
Bend radius: 57.1mm

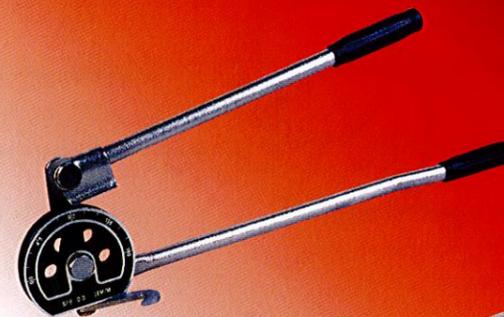


OXY-364-12-3/4" & 19mm

For 3/4" & 19mm O.D. tubing
Bend radius: 76.2mm

OXY-364-14-7/8" & 22mm

For 7/8" & 22mm O.D. tubing
Bend radius: 76.2mm

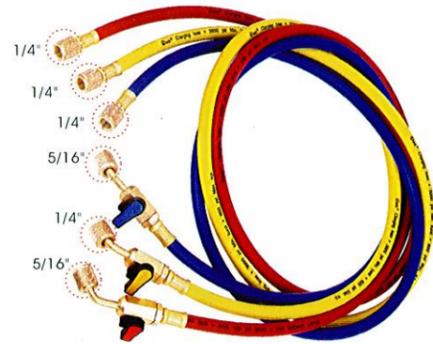

OXY-41036/BV


1/4" STANDARD CHARGING HOSE WITH 45° BENDER BALL VALVE For R12&R22
优质45°弯头球阀胶管

Item No.:	Connection	Length
OXY-12236/BV	1/4"X1/4"	36"(90cm)
OXY-12260/BV	1/4"X1/4"	60"(150cm)
OXY-12272/BV	1/4"X1/4"	72"(180cm)

1/4" PREMIUM CHARGING HOSE WITH 45° BENDER BALL VALVE For R410 A
高压45°弯头球阀胶管

Item No.:	Connection	Length
OXY-41036/BV	1/4"X5/16"	36"(90cm)
OXY-41060/BV	1/4"X5/16"	60"(150cm)
OXY-41072/BV	1/4"X5/16"	72"(180cm)

OXY-12236/SV

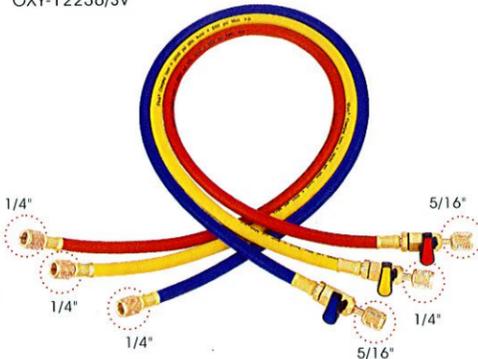

- Full flow valve for faster recovery. Low loss fitting.
- Hose and ball valve rated for higher pressure, 4000psi burst and 800 psi working pressure uses standard gasket and valve opening.
- New compact design ball valve with plastic handle at end of hose fits tight areas and traps all the gas

1/4" STANDARD CHARGING HOSE WITH STRAIGHT BALL VALVE For R12&R22
优质直接头球阀胶管

Item No.:	Connection	Length
OXY-12236/SV	1/4"X1/4"	36"(90cm)
OXY-12260/SV	1/4"X1/4"	60"(150cm)
OXY-12272/SV	1/4"X1/4"	72"(180cm)

1/4" PREMIUM CHARGING HOSE WITH STRAIGHT BALL VALVE For R410
高压直接头球阀胶管


Item No.:	Connection	Length
OXY-41036/SV	1/4"X5/16"	36"(90cm)
OXY-41060/SV	1/4"X5/16"	60"(150cm)
OXY-41072/SV	1/4"X5/16"	72"(180cm)

1/4" STANDARD CHARGING HOSE WITH IN-LINE BALL VALVE 优质带球阀胶管

Item No.:	Connection	Length
OXY-12236/INBV	1/4"X1/4"	36"(90cm)
OXY-12260/INBV	1/4"X1/4"	60"(150cm)
OXY-12273/INBV	1/4"X1/4"	72"(180cm)

1/4" PREMIUM CHARGING HOSE WITH IN-LINE BALL VALVE 高压带球阀胶管

Item No.:	Connection	Length
OXY-41036/INBV	1/4"X5/16"	36"(90cm)
OXY-41060/INBV	1/4"X5/16"	60"(150cm)
OXY-41072/INBV	1/4"X5/16"	72"(180cm)

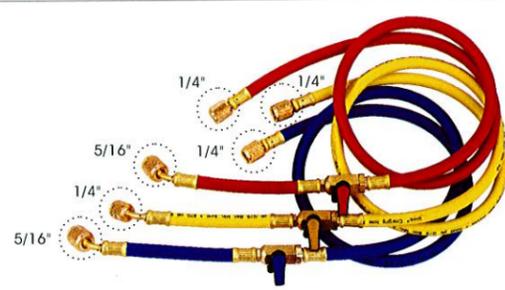

OXY-41036/INBV

- Valve handle position shows when valve is opened, closed for anywhere between.
- Improved smaller ergonomic valve with zero restriction for maximum flow.
- With 45° bender ball valve extension 12mm


- Wide range of flexible hoses for R12&R22, R134a, R410A Refrigerant
- 3pcs red, yellow&blue hoses sets
- Special length or individual charging hose are also available

- Standard charging hose with working pressure 600psi/3000psi for R12&R22, R134a
- Premium charging hose with Working pressure 870psi/4000psi for R410A

OXY-001HRP

HOSE REPLACEMENT PARTS 修理包

- 6 Pcs Teflon Hose Seal Gaskets
The lifetime of teflon-gasket compared to ordinary rubber is at last 10 times longer
- 3 Pcs Core Depressors

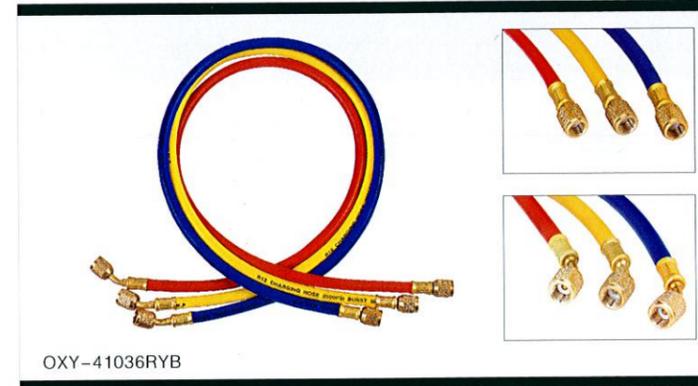

OXY-41036RYB

1/4" STANDARD CHARGING HOSE
For R12&R22&R134 优质胶管

Item No.:	Connection	Length
OXY-12236RYB	1/4"X1/4"	36"(90cm)
OXY-12260RYB	1/4"X1/4"	60"(150cm)
OXY-12272RYB	1/4"X1/4"	72"(180cm)
OXY-13436RYB	1/4"X1/4"	36"(90cm)
OXY-13460RYB	1/4"X1/4"	60"(150cm)
OXY-13472RYB	1/4"X1/4"	72"(180cm)

1/4" PREMIUM CHARGING HOSE
For R410 高压胶管

Item No.:	Connection	Length
OXY-41036RYB	1/4"X5/16"	36"(90cm)
OXY-41060RYB	1/4"X1/4"	60"(150cm)
OXY-41072RYB	1/4"X5/16"	72"(180cm)

- Special design puts features in a large volume 3/8" I.D. heavy-duty hose
- Permeation resistant barrier
- Burst pressure is 3000 psi with working pressure 600 psi
- Connection 1/2"X1/2" SAE fitting
- Only in yellow color




OXY-VCH36Y

3/8" PREMIUM HEAVY-DUTY CHARGING HOSES
真空优质胶管

Item No.:	Connection	Length
OXY-VCH36Y	1/2"X1/2"	36"(90cm)
OXY-VCH60Y	1/2"X1/2"	60"(150cm)
OXY-VCH72Y	1/2"X1/2"	72"(180cm)


SERIES OF SHORT HOSE WITH BALL VALVE 短球阀胶管系列

45° BENDER BALL VALVE EXTENSIONS 12CM




OXY-12BV-R 1/4"X1/4"
OXY-12BV-Y 1/4"X1/4"
OXY-12BV-B 1/4"X1/4"

45° BENDER BALL VALVE EXTENSIONS 12CM




OXY-410BV-R 1/4"X5/16"
OXY-410BV-Y 1/4"X1/4"
OXY-410BV-B 1/4"X5/16"

BALL VALVE HOSE EXTENSIONS 12CM



OXY-12SV-R 1/4"X1/4"
OXY-12SV-Y 1/4"X1/4"
OXY-12SV-B 1/4"X1/4"

BALL VALVE HOSE EXTENSIONS 12CM



OXY-410SV-R 1/4"X5/16"
OXY-410SV-Y 1/4"X1/4"
OXY-410SV-B 1/4"X5/16"

45° SWIVEL ELBOW* MALE FULL FLOW BALL VALVE




OXY-14BV45
1/4" SAE Female, 1/4" SAE male

45° SWIVEL ELBOW* MALE FULL FLOW BALL VALVE



OXY-14516BV45
1/4" SAE Female, 5/16" SAE Male

SWIVEL NUT STRAIGHT* MALE FULL FLOW BALL VALVE



OXY-14SV
1/4" SAE Female, 1/4" SAE Male

SWIVEL NUT STRAIGHT* MALE FULL FLOW BALL VALVE



OXY-14SV-M
1/4" SAE Male, 1/4" SAE Male

REFRIGERANT GAUGE FOR R410A 专用于R410A冷媒表

OXY-250410G

70mm low pressure side
Connection 1/8" NPT
Scale for R410A/R407c/R22
° C or ° F PSI KG



OXY-500410G

70mm high pressure side
Connection 1/8" NPT
Scale for R410A/R407c/R22
° C or ° F PSI KG



REFRIGERATION GAUGE FOR R12&R22 专用于R12&R22冷媒表

OXY-25012G

70mm low pressure side
Connection 1/8" NPT
Scale for R12/R22/R134A/R404A
° C or ° F PSI KG



OXY-50012G

70mm high pressure side
Connection 1/8" NPT
Scale for R12/R22/R134A/R404A
° C or ° F PSI KG



OXY-25022G

70mm low pressure side
Connection 1/8" NPT
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG



OXY-50022G

70mm high pressure side
Connection 1/8" NPT
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG



REFRIGERANT GAUGE FOR R134A 专用于R134A冷媒表

OXY-250134G

70mm low pressure side
Connection 1/8" NPT
Scale for R134A
° C or ° F PSI KG



OXY-500134G

70mm high pressure side
Connection 1/8" NPT
Scale for R134A
° C or ° F PSI KG



INLAY TYPE GAUGE
埋入式表

OXY-25022G

60mm low pressure side
Steel frame, Without oil filled,
connection 1/4" SAE
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG



INLAY TYPE GAUGE WITH GLYCERINE
埋入式充油表

OXY-25022GO

60mm low pressure side
Stainless steel frame
Oil filled, connection 1/4" SAE
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG



OXY-50022FG

60mm high pressure side
Steel frame, Without oil filled,
connection 1/4" SAE
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG




OXY-50022GO

60mm high pressure side
Stainless steel frame
Oil filled, connection 1/4" SAE
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG



3-1/8"/80MM REFRIGERANT GAUGE WITH GLYCERINE

80MM 直立式充油表

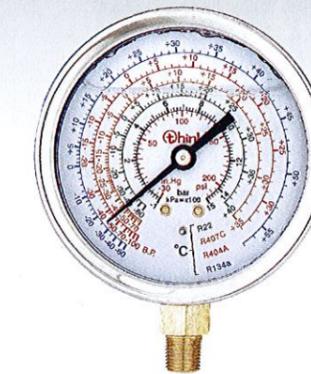

OXY-25022GO-80

80mm low pressure side
Connection 1/8" NPT
Stainless steel frame, Oil filled
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG




OXY-50022GO-80

80mm high pressure side
Connection 1/8" NPT
Stainless steel frame, Oil filled
Scale for R22/R134A/R404A/R407c
° C or ° F PSI KG

4-WAY ALUMINIUM TESTING MANIFOLD WITH PISTON VALVE FOR R410A

- 4-Valve Efficiency—vacuum, low side, high side, and refrigerant lines are individually connected and controlled
- No need to switch charging lines
- One-piece aluminium manifold body 4 pcs ergonomic handles & a hook
- Ergonomic Handles—Durable, soft touch non-slip surface, even with only fingers 870PSI working pressure, 4000PSI burst

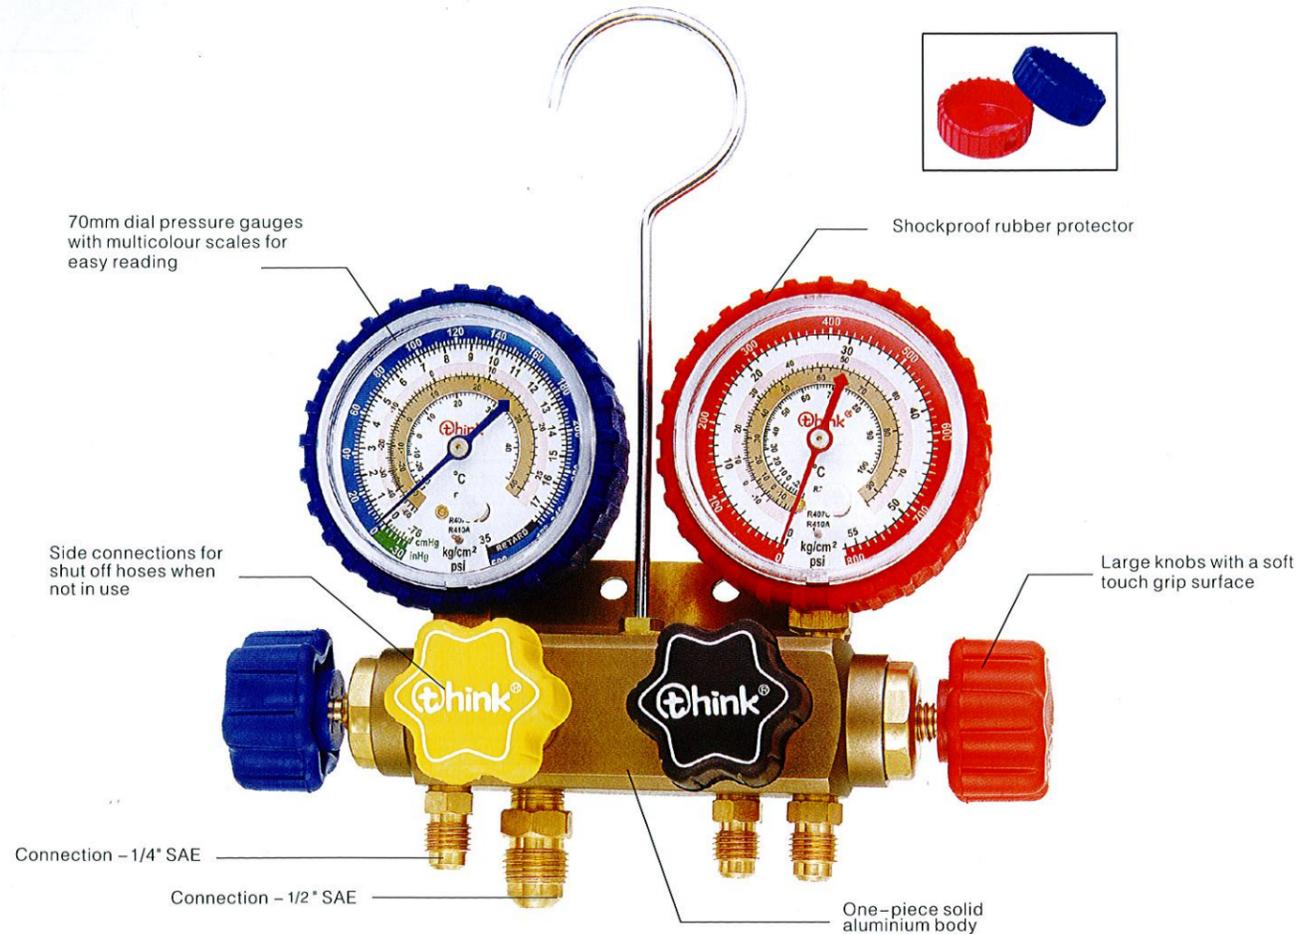

4-WAY ALUMINIUM TESTING MANIFOLD WITH PISTON VALVE FOR R410A
专用于R410A四通新活塞型铝架表组

- OXY-836G410** Set of OXY-41036RYB & 1pc OXY-VCH36Y Charging hoses, H/L pressure gauges for R410A. One-piece solid aluminum body.
- OXY-860G410** Set of OXY-41060RYB & 1pc OXY-VCH60Y Charging hoses, H/L pressure gauges for R410A. One-piece solid aluminum body.
- OXY-872G410** Set of OXY-41072RYB & 1pc OXY-VCH72Y Charging hoses, H/L pressure gauges for R410A. One-piece solid Aluminum body.


Hose sets with a ball valve are also available, see page 13 & 14



OXY-836G410

4-WAY ALUMINIUM MANIFOLD WITH PISTON VALVE FOR R22

- 4-Valve Efficiency—vacuum, low side, high side, and refrigerant lines are individually connected and controlled
- No need to switch charging lines
- No need to switch charging lines
- One-piece aluminium manifold body 4 purchase ergonomic handles & a hook
- Ergonomic Handles—Durable, soft touch non-slip surface, even with only fingers 870PSI working pressure, 4000PSI burst

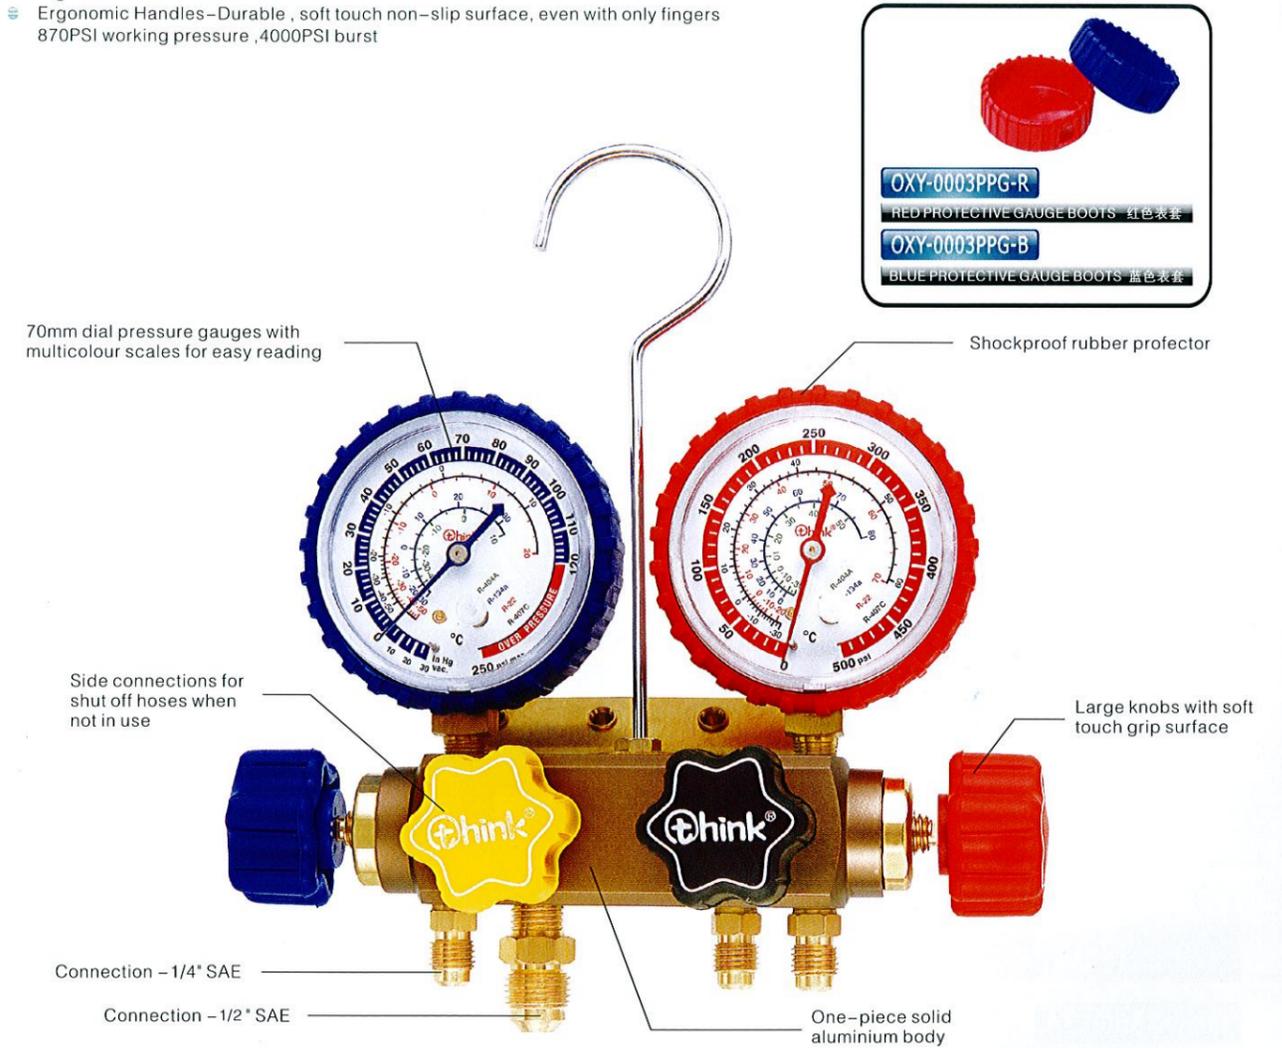

4 WAY MANIFOLD WITH PISTON VALVE FOR R22 专用于R22四通新活塞型铝架表组

- OXY-836G22** Set of OXY-12236RYB & 1pc OXY-VCH36Y Charging hoses, H/L pressure gauges for R22. One-piece solid aluminum body.
- OXY-860G22** Set of OXY-12260RYB & 1pc OXY-VCH60Y Charging hoses, H/L pressure gauges for R22. One-piece solid aluminum body.
- OXY-872G22** Set of OXY-41072RYB & 1pc OXY-VCH72Y Charging hoses, H/L pressure gauges for R22. One-piece solid Aluminum body.

Hose sets with a ball valve are also available, see page 13 & 14

2-WAY ALUMINIUM TESTING MANIFOLD WITH SIGHT GLASS FOR R410A
专用于R410A铝架带视镜表组

OXY-136G410


Set of OXY-41036RYB Charging hose
OXY-250410G&OXY-500410G refrigerant gauges
One-piece solid aluminium body with sight glass

OXY-160G410

Set of OXY-41060RYB charging hose
OXY-250410G&OXY-500410G refrigerant gauges
One piece solid aluminium body with sight glass

OXY-172G410

Set of OXY-41072RYB charging hose
OXY-250410G&OXY-500410G refrigerant gauges
One piece solid aluminium body with sight glass
Hose sets with a ball valve are also available,
see page 13 & 14

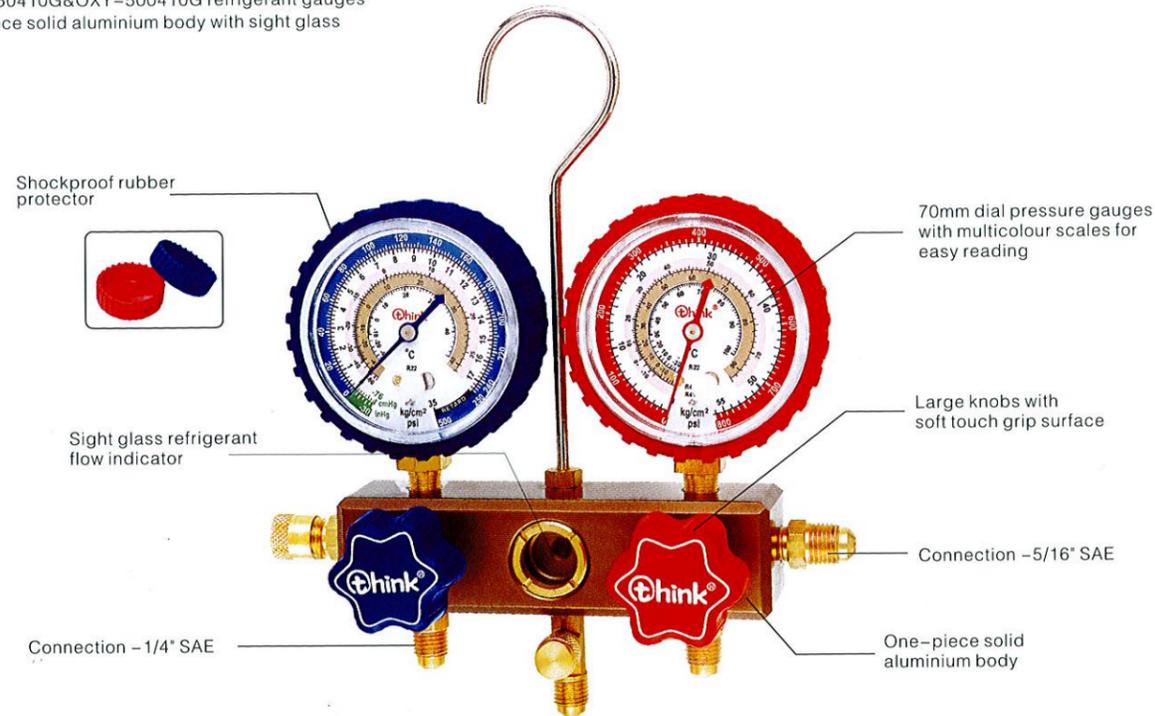

2-WAY ALUMINIUM TESTING MANIFOLD WITH SIGHT GLASS FOR R134A
专用于R134A铝架带视镜表组

OXY-236G134

Set of OXY-13436RYB Charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One-piece solid aluminium body with sight glass

OXY-260G134

Set of OXY-13460RYB charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One piece solid aluminium body with sight glass


OXY-272G134

Set of OXY-13472RYB charging hose
Set of QC-12H/L quick coupler
OXY-250134G&500134 refrigerant gauges
One piece solid aluminium body with sight glass
QC-HM&QC-LM quick coupler are also available
Hose sets with a ball valve are also available,
see page 13 & 14



QC-12H/L

QC-LM QC-HM

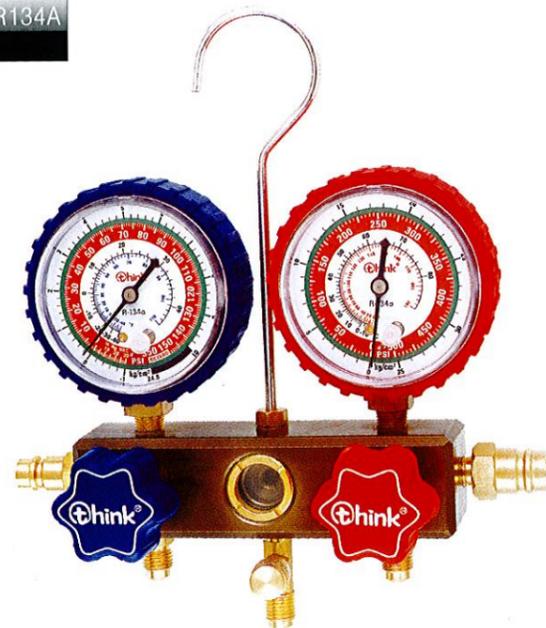

2-WAY ALUMINIUM TESTING MANIFOLD WITH SIGHT GLASS FOR R22
专用于R22铝架带视镜表组

OXY-136G22


Set of OXY-12236RYB Charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One-piece solid aluminium body with sight glass

OXY-160G22

Set of OXY-12260RYB charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One piece solid aluminium body with sight glass

OXY-172G22

Set of OXY-12272RYB charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One piece solid aluminium body with sight glass
Hose sets with a ball valve are also available,
see page 13 & 14

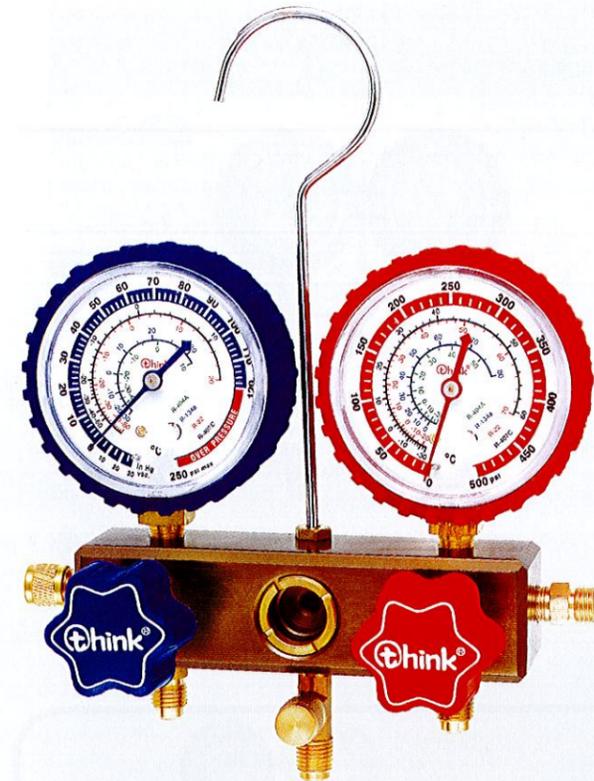

2-WAY ALUMINIUM TESTING MANIFOLD WITH SIGHT GLASS FOR R12&R22
专用于R12&R22铝架带视镜表组

OXY-136G12

Set of OXY-12236RYB Charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One-piece solid aluminium body with sight glass


OXY-160G12

Set of OXY-12260RYB charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One piece solid aluminium body with sight glass

OXY-172G12

Set of OXY-12272RYB charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One piece solid aluminium body with sight glass

Hose sets with a ball valve are also available,
see page 13 & 14

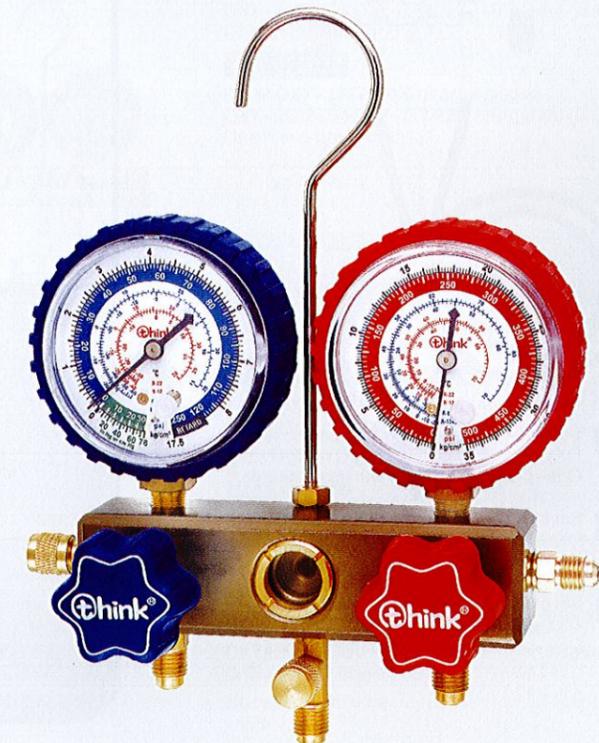

FOR R134A BRASS TESTING MANIFOLD
WITH SIGHT GLASS
专用于R134A 带视镜铜架表组

OXY-536G134A

Set of OXY-13436RYB Charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One-piece brass body with sight glass


OXY-560G134A

Set of OXY-13460RYB charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One piece solid brass body with sight glass


OXY-572G134A

Set of OXY-13472RYB charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One piece solid brass body with sight glass

QC-HM&QC-LM quick coupler are also available
Hose sets with a ball valve are also available,
see page 13 & 14

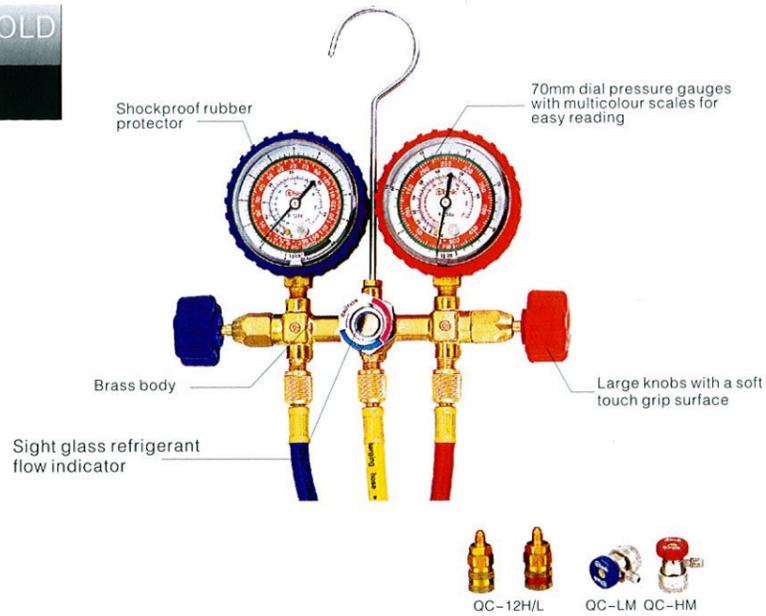

FOR R22 BRASS TESTING MANIFOLD
WITH SIGHT GLASS
专用于R22带视镜铜架表组

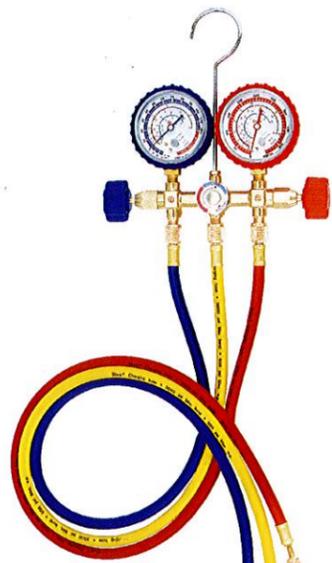

OXY-536G22


Set of OXY-12236RYB Charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One-piece brass body with sight glass

OXY-560G22

Set of OXY-12260RYB charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One-piece brass body with sight glass

OXY-572G22

Set of OXY-12272RYB charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One-piece brass body with sight glass
Hose sets with a ball valve are also available,
see page 13 & 14

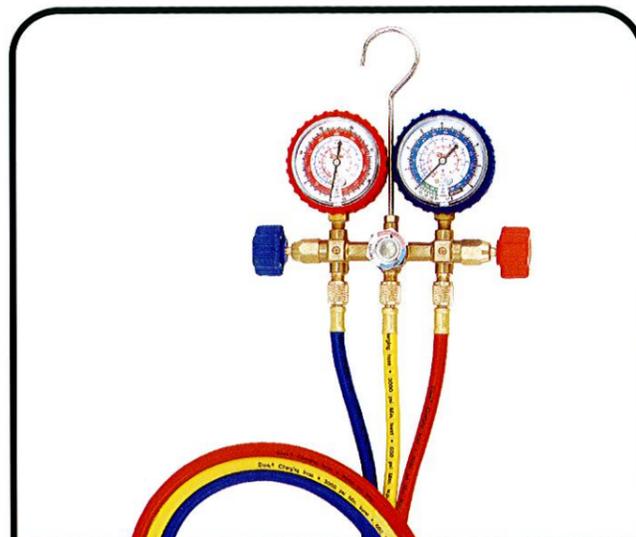

FOR R12&R22 BRASS TESTING MANIFOLD
WITH SIGHT GLASS
专用于R12&R22带视镜铜架表组

OXY-536G12

Set of OXY-12236RYB Charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One-piece brass body with sight glass

OXY-560G12

Set of OXY-12260RYB charging hose
OXY-25011G&OXY-50012G refrigerant gauges
One-piece brass body with sight glass

OXY-572G12

Set of OXY-12272RYB charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One-piece brass body with sight glass
Hose sets with a ball valve are also available,
see page 13 & 14

FOR R134A BRASS TESTING MANIFOLD
专用于R134A 铜架表组

OXY-636G134A

Set of OXY-13436RYB Charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One-piece brass body


OXY-660G134A

Set of OXY-13460RYB charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One-piece brass body

OXY-672G134A

Set of OXY-13472RYB charging hose
Set of QC-12H/L quick coupler
OXY-250134G&OXY-500134G refrigerant gauges
One piece brass body

QC-HM&QC-LM quick coupler are also available
Hose sets with a ball valve are also available,
see page 13 & 14

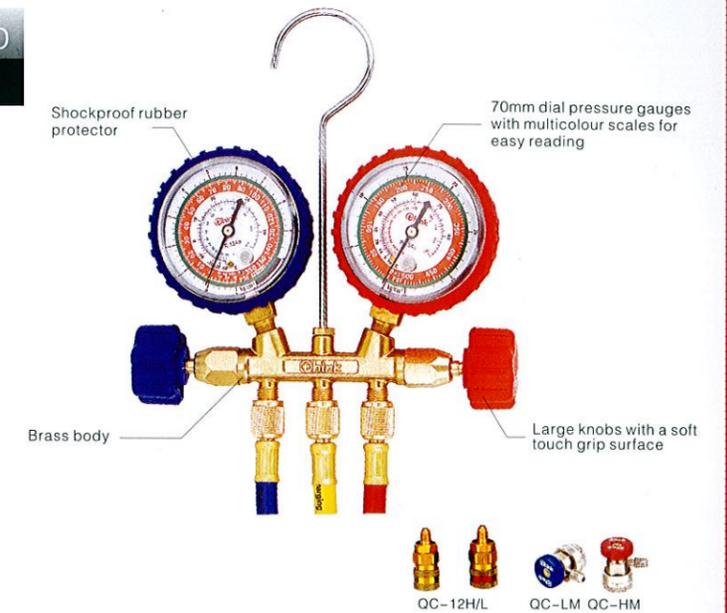

FOR R22 BRASS TESTING MANIFOLD
专用于R22铜架表组

OXY-636G22

Set of OXY-12236RYB Charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One piece brass body

OXY-660G22

Set of OXY-12260RYB charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One piece brass body

OXY-672G22

Set of OXY-12272RYB charging hose
OXY-25022G&OXY-50022G refrigerant gauges
One piece brass body
Hose sets with a ball valve are also available,
see page 13 & 14

FOR R12&R22 BRASS TESTING MANIFOLD
专用于R12&R22 铜架表组

OXY-636G12


Set of OXY-12236RYB Charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One-piece brass body

OXY-660G12

Set of OXY-12260RYB charging hose
OXY-25011G&OXY-50012G refrigerant gauges
One-piece brass body

OXY-672G12

Set of OXY-12272RYB charging hose
OXY-25012G&OXY-50012G refrigerant gauges
One-piece brass body
Hose sets with a ball valve are also available,
see page 13 & 14

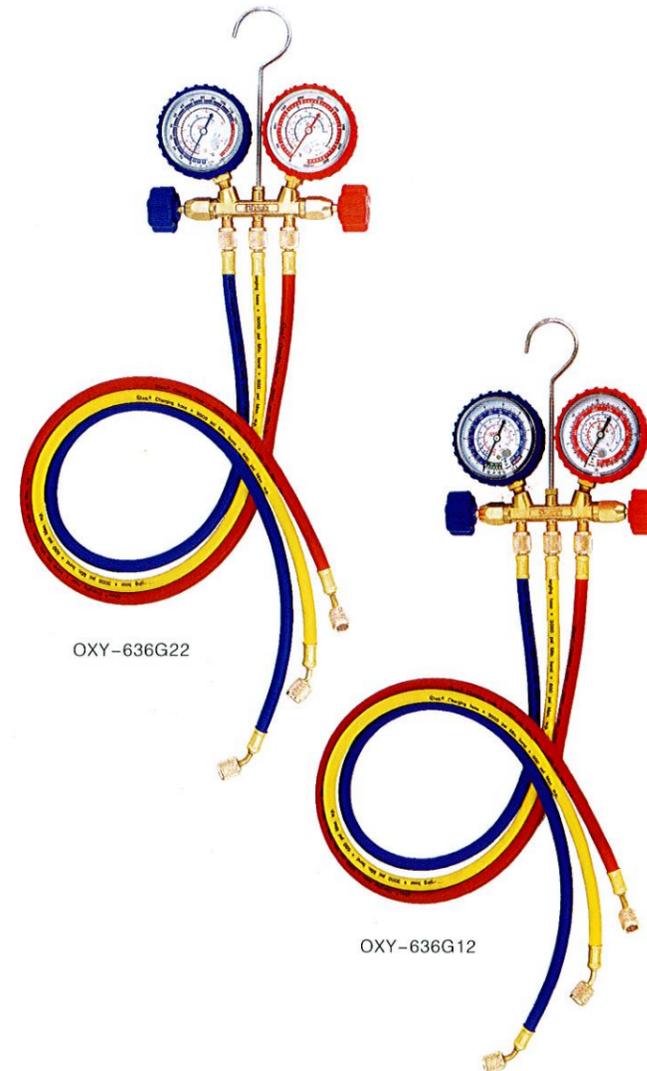

OXY-636G22



OXY-636G12



OXY-467GH

OXY-467GL

OXY-467GL

FOR R12&R22 SINGLE TESTING MANIFOLD

For R12&22 refrigerant
Aluminum manifold body
With a low pressure refrigerant pressure
With 2pcs charging hoses

OXY-467GH

FOR R12&R22 SINGLE TESTING MANIFOLD

For R12&22 refrigerant
Aluminum manifold body
With a high pressure refrigerant gauge
With 2pcs charging hoses

OXY-468GL

FOR R134a SINGLE TESTING MANIFOLD

For R134a refrigerant
Aluminum manifold body
With a low pressure refrigerant gauge
With 2pcs charging hoses

OXY-468GH

FOR R134a SINGLE TESTING MANIFOLD

For R134a refrigerant
Aluminum manifold body
With a high pressure refrigerant gauge
With 2pcs charging hoses



OXY-468GH

OXY-468GL

OXY-469GH

FOR R410A SINGLE TESTING MANIFOLD

For R410A refrigerant
Aluminum manifold body
With a high pressure refrigerant gauge
With 2pcs charging hoses

OXY-469GL

FOR R410A SINGLE TESTING MANIFOLD

For R410A refrigerant
aluminum manifold body
With a low pressure refrigerant gauge
With 2pcs charging hoses



OXY-469GH



OXY-469GL

OXY-1028E


A/C REMOTE CONTROLLER A/C迷你型通用遥控器

- Can control over 200 different world famous brands of Air-conditioners
- It contains the most common functions of those design for air-conditioners of various.
- Well-known brands, with large screen display.
- Easy to set up.




CAM-LIFT SAFETY LATCH

SAFETY LATCHES & INSIDE RELEASE HANDLES 冷冻库门安全把手




OXY-1178L

凸门把手
Material: High pressure die-cast zinc,
Adjustable height from 63.00mm to 100.00mm

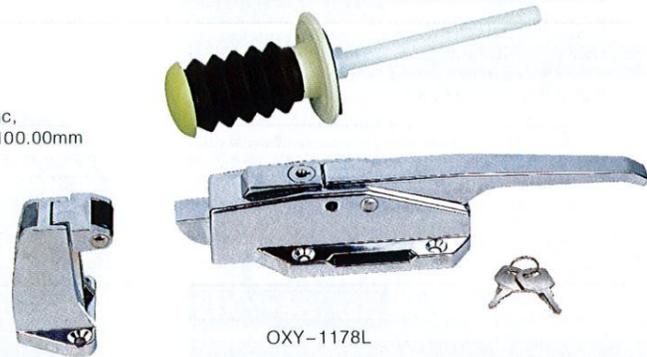


OXY-1178L



OXY-1179L

平门把手
Material: High pressure die-cast zinc,
Adjustable height from 25.00mm to 33.00mm


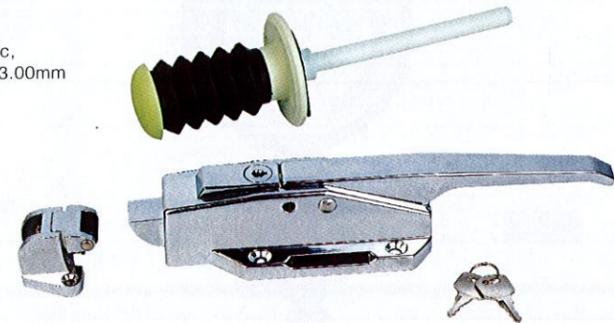


OXY-1179L

OXY-1450H

ADJUSTABLE DOOR HINGE
铰链

Material: High pressure die-cast zinc





OXY-1450H

OXY-1460H

ADJUSTABLE DOOR HINGE
铰链

Material: High pressure die-cast zinc





OXY-1460H

OXY-1470H

ADJUSTABLE DOOR HINGE
铰链

Material: High pressure die-cast zinc

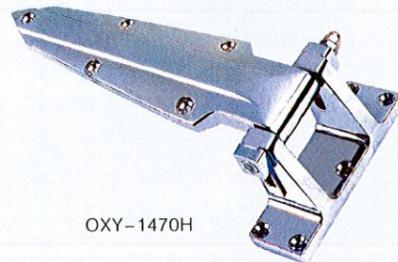

OXY-1470H


DOUBLE SAFETY LATCHES & INSIDE RELEASE HANDLES
不锈钢双把手

OXY-2278LS

Material: Precision stainless steel
Adjustable height from 63.00mm to 100.00mm

OXY-2279LS

Material: Precision stainless steel
Adjustable height from 25.00mm to 33.00mm

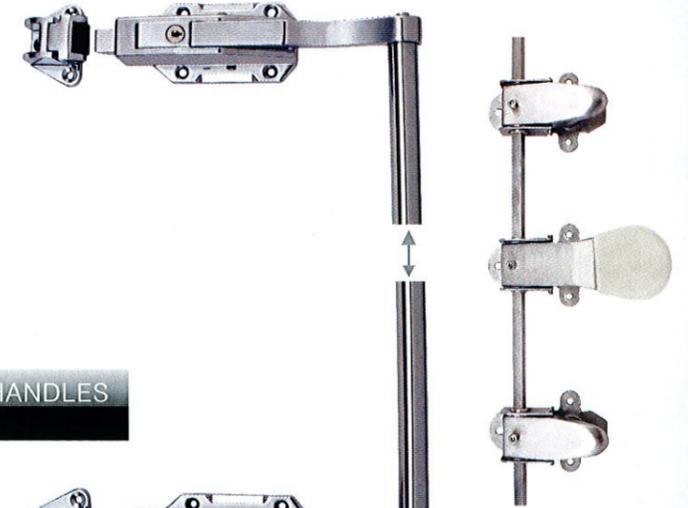

OXY-2278LS

DOUBLE SAFETY LATCHES & INSIDE RELEASE HANDLES
锌合金双把手

OXY-2278L

Material: High pressure die-cast zinc
Adjustable height from 63.00mm to 100.00mm

OXY-2279L

Material: High pressure die-cast zinc
Adjustable height from 25.00mm to 33.00mm


RINGY SAFETY LATCHES 不锈钢拉把手

OXY-2280LS

Material: Precision stainless steel
Adjustable height from 63.00mm to 100.00mm

OXY-2281LS

Material: Precision stainless steel
Adjustable height from 25.00mm to 33.00mm

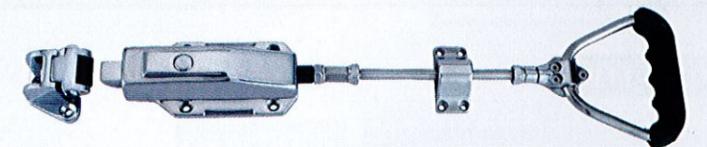

OXY-2281LS

RINGY SAFETY LATCHES 锌合金拉把手

OXY-2280L

Material: High pressure die-cast zinc
Adjustable height from 63.00mm to 100.00mm


OXY-2281L

Material: High pressure die-cast zinc
Adjustable height from 25.00mm to 33.00mm

OXY-1310L

BIG HANDLE 平移门大把手

Material: High pressure die-cast zinc

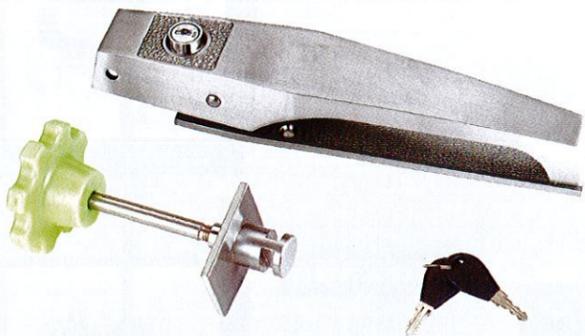


OXY-1310L

OXY-1330H

HYDRAULIC DOOR CLOSE 闭门回归器

Material: Steel body, plastic case.

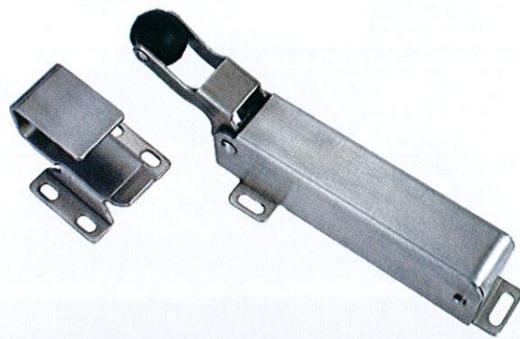


OXY-1330H


OXY-1320H

BIG HINGE(with spring)平移门铰链

Material: High pressure die-cast zinc



OXY-1320H

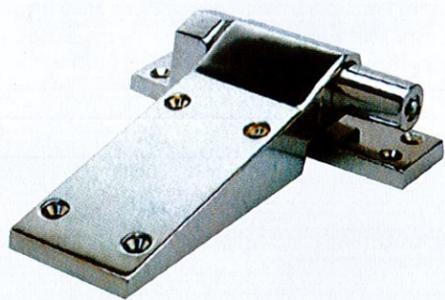


OXY-1320H

OXY-1110R

VENTILATOR 冷冻库门平衡窗

AC-220V-36W power
AC-110V-36W power




OXY-1110R

OXY-1111G

FASTENER 冷冻库板固定器

L: 38cm W:26cm




OXY-1111G

OXY-1238S

REVERSIBLE CAM-LIFT
HINGE(with spring) 凸门铰链 (带弹簧)

Material: High pressure die-cast zinc




OXY-1238S

OXY-1230S

REVERSIBLE CAM-LIFT
HINGE(with spring) 平门铰链 (带弹簧)

Material: High pressure die-cast zinc




OXY-1230S

OXY-1238N

REVERSIBLE CAM-LIFT
HINGE(w/o spring) 凸门铰链 (无弹簧)

Material: High pressure die-cast zinc




OXY-1238N

OXY-1230N

REVERSIBLE CAM-LIFT
HINGE(w/o spring) 平门铰链 (无弹簧)

Material: High pressure die-cast zinc



OXY-1230N


OXY-1400L

LEVER & ROLLER LATCH 小把手

Material: High pressure die-cast zinc



OXY-1400L




OXY-1400L


OXY-1200L

EDGEMOUNT MECHANICAL LATCH 中把手

Material: High pressure die-cast zinc

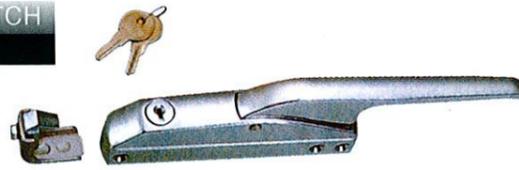

OXY-1200L



OXY-1200L


OXY-1132H

EDGEMOUNT CAM-LIFT HINGE 铰链

Material: High pressure die-cast zinc



OXY-1132H




OXY-1132H


OXY-1332H & XOY-1336H

EDGEMOUNT HINGE 铰链

Material: High pressure die-cast zinc
2pcs per box



OXY-1332H&OXY-1336H



OXY-1332H




OXY-1336H


OXY-1428H

LEAF HINGE 铰链

Material: High pressure die-cast zinc
2pcs per box



OXY-1428H



OXY-1428H

OXY-201

7" PINCH-OFF PLIER 封口钳

7" Pinch off plier can pinch off copper tubing up to 3/4" (19mm) instantly.



OXY-351

FIN STRAIGHTENER 散热刷

For: 8", 9", 10", 12", 14", 15" spacing per inch.



OXY-202

PIERCING PLIER 恢复维修钻孔钳

Enables an immediate piercing on the charging tube at and refrigerator or freezer



OXY-352

FIN STRAIGHTENER 不锈钢散热刷

Fin straightener stainless steel. Cleaning & straightening evaporator fin.



OXY-95S

SWAGING PUNCH 冲仔 (五合一)

5-in-1 Punch
For 1/4", 5/16", 3/8", 1/2" & 5/8" O.D. tubing



OXY-96S

SWAGING PUNCH 冲仔 (六合一)


6-in-1 Punch
For 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. tubing



OXY-193S

SWAGING PUNCHES 冲仔

For 1/4", 5/16", 3/8", 1/2", 5/8" O.D. tubing



OXY-122

RATCHET WRENCH 棘轮扳手

4 Sizes: 1/4", 3/8", 3/16" & 5/16" square ratchet.



OXY-123L

RATCHET WRENCH 棘轮扳手

4 Sizes: 1/4", 3/16" square, 9/16", 1/2" hex ratchet.



OXY-121L

RATCHET WRENCH 双角度棘轮扳手

Square: 1/4" X 3/8" and 3/16" X 5/16"



AIR-CONDITIONING PARTS

OXY-337

CAN TAP VALVE 开启阀

For R12&R22&R134.



OXY-338

CAN TAP VALVE 开启阀

For R12&R22



OXY-339

CAN TAP VALVE 开启阀


For R134a



OXY-AVT

ACCSS VALVE TOOL 阀芯工具

Charging and evacuation valve for fluid filling by Schrader valves.
Save about 50% of usual service time



OXY-SOVM

SOLENOID VALVE
OPERATION MAGNET

电磁阀磁性控制器
The quickest and easiest way to operate solenoid vales manually
Converts electrically operated solenoid valved in hand operated valves in seconds



OXY-900M

CAPILLARY TUBE 毛细管

1/8" capillary tube
Two 1/4" flared tube with two 1/4" copper nuts
Length is 90cm total.



OXY-128

CAPILLARY TUBE CUTTER 毛细管剪

Cues all sizes of capillary tubes without collapsing nor swaging the tubes.



SU-04

SOLDER UNION 充液阀

SU-02 1/4" O.D.tubing
SU-04 1/4" O.D.tubing
With 10cm Extension copper tube



QC-12H& QC-12L

QUICK COUPLER 快速接头

High & low pressure sets
With 1/4" male flare hose thread.



QC-12L

QC-12H

QUICK COUPLER 快速接头



QC-H



QC-L

QC-H

High pressure quick coupler fitting with 14mm female thread with a brass fitting

QC-L

Low pressure quick coupler fitting with 14mm female thread with a brass fitting

OXY-208

INNER-OUTER REAMER 铰刀

Plastic body, 3/16" ~ 1-1/2" O.D. tubing.
Reams both inside and outside edges of tubing.



QC-HM



QC-LM

QC-HM

High pressure quick coupler fitting with 1/4" male thread

QC-LM

Low pressure quick coupler fitting with 1/4" male thread

OXY-207

HANDY DEBURRER CUTTER 直柄铰刀



喇叭型手阀

HAND VALVE

Flare Type
OXY-D-04-1/4"
OXY-D-06-3/8"
OXY-D-08-1/2"
OXY-D-10-5/8"
OXY-D-12-3/4"
OXY-D-14-7/8"



OXY-D-04

焊口型手阀

HAND VALVE

Solder Type
OXY-D-04S-1/4"
OXY-D-06S-3/8"
OXY-D-08S-1/2"
OXY-D-10S-5/8"
OXY-D-12S-3/4"
OXY-D-14S-7/8"



OXY-D-04S

喇叭型视镜

SIGHT GLASS

Flare Type
OXY-800-04-1/4"
OXY-800-06-3/8"
OXY-800-08-1/2"
OXY-800-10-5/8"
OXY-800-12-3/4"



OXY-800-04

焊口型视镜

SIGHT GLASS

Solder Type
OXY-800-04S-1/4"
OXY-800-06S-3/8"
OXY-800-08S-1/2"
OXY-800-10S-5/8"
OXY-800-12S-3/4"



OXY-801-04S

SHORT NUT

Item No	Tube O.D. IN
SN2-04	1/4"
SN2-06	3/8"
SN2-08	1/2"
SN2-10	5/8"
SN2-12	3/4"



FORGED NUT

Item No	Tube O.D. IN
NF-10	5/8"
NF-12	3/4"
NF-14	7/8"



FLARE CAP

Item No	Tube O.D. IN
OXY-640-04	1/4"



VALVE CORE REMOVE

VCR-04-1/4"



FLARE TO SOLDER UNION

Item No	Tube O.D. IN
FSU-04*04	1/4"X1/4"
FSU-04*06	1/4"X3/8"



UNION

Item No	Tube O.D. IN
U-04	1/4"
U-06	3/8"
U-08	1/2"
U-10	5/8"
U-12	3/4"



CONNECTOR WITH VALVE CORE

OXY-627-04X02
1/4"X1/8"NPT
OXY-627-04X04
1/4"X1/4"NPT
with valve core



UNION ELBOW

Item No.	Tube O.D. IN
UE-04	1/4"X1/4"
UE-06	3/8"X3/8"
UE-08	1/2"X1/2"
UE-10	5/8"X5/8"
UE-12	3/4"X3/4"



MALE ELBOW

Item No.	Tube O.D.
ME-04X02	1/4"flare x1/8" NPT
ME-04X04	1/4"flare x1/4" NPT



FEMALE CONNECTOR

Item No.	Tube O.D. IN NPS
FC-04X02	1/4"X1/8"
FC-04X04	1/4"X1/4"
FC-04X06	1/4"X3/8"



PLUG

Item No.	Tube O.D. IN NPS
P-04	1/4"
P-05	5/16"
P-06	3/8"
P-08	1/2"
P-10	5/8"
P-12	3/4"



UNION TEE

Item No.	Tube O.D. IN
UT-04	1/4"
UT-06	3/8"
UT-08	1/2"
UT-10	5/8"
UT-12	3/4"



UNION TEE

Item No.	Tube O.D. IN
OXY-682-04X02	1/4"X1/4"X1/8"NPS
OXY-682-04X04	1/4"X1/4"X1/4"



CHARGING FITTING

Item No.	Tube O.D. IN
OXY-672-04X02	1/4"X1/4"X1/8"NPT
OXY-672-04X04	1/4"X1/4"X1/4"NPT



CYLINDER ADAPTER

CA-03X12	10mm X3/4"P.S. thread R134A use
CA-04X12	1/4" flare X 3/4"P.S. thread R12 use
CA-05X12	1/2"ACME X 3/4"P.S. thread R134A use
CA-08X12	1/2" flare X 3/4"P.S. thread R12 use



CA-04X05	1/4"flare male X 1/2" ACME female
----------	-----------------------------------



CA-05X04	1/2"ACME male X 1/4" flare female
----------	-----------------------------------



CA-04X08	1/4"M.F(7/16"-20UNF)XM14X1.5with o-ring
CA-06X08	3/8"M.F(5/8"-18UNF)XM14X1.5with o-ring



COPPER FITTING

45° ELBOW 45度承口径弯头

Item No	D(inch)	Item No	D(mm)
E45-	1/4"	E45	15mm
E45-	3/8"	E45	16mm
E45-	1/2"	E45	22mm
E45-	5/8"	E45	25mm
E45-	3/4"	E45	28mm
E45-	7/8"	E45	32mm
E45-	1"	E45	42mm
E45-	1-1/8"	E45	44mm
E45-	1-1/4"	E45	45mm
E45-	1-3/8"	E45	54mm
E45-	1-1/2"	E45	108mm
E45-	1-5/8"		

Special sizes available request

90° ELBOW 90度承口径弯头

Item No	D(inch)	Item No	D(mm)	Item No	D(mm)
E90	1/4"	E90	6mm	E90	28mm
E90	3/8"	E90	8mm	E90	32mm
E90	1/2"	E90	10mm	E90	35mm
E90	5/8"	E90	12mm	E90	38mm
E90	3/4"	E90	13mm	E90	40mm
E90	7/8"	E90	14mm	E90	42mm
E90	1"	E90	15mm	E90	44mm
E90	1-1/8"	E90	16mm	E90	45mm
E90	1-1/4"	E90	22mm	E90	50mm
E90	1-3/8"	E90	25mm	E90	51mm
E90	1-1/2"				
E90	1-5/8"				
E90	1-3/4"				
E90	2"				

Special sizes available request

180° ELBOW 180度承口径弯头

Item No	D(inch)	A(inch)
E180	3/8"	1"
E180	1/2"	1-1/4"
E180	5/8"	1-1/2"
E180	3/4"	2-3/8"
E180	7/8"	2-1/2"
E180	1"	3"
E180	1-1/8"	3-3/8"
E180	1-1/4"	4-1/4"
E180	1-3/8"	4-1/4"
E180	1-1/2"	4-3/8"
E180	8mm	24mm
E180	10mm	30mm
E180	12mm	36mm
E180	16mm	48mm
E180	22mm	64mm
E180	25mm	76mm
E180	28mm	88mm
E180	32mm	32mm
E180	35mm	108mm
E180	38mm	111mm
E180	54mm	154mm

Special sizes available request



STRAIGHT COUPLING

承口径内径直接头

Item No	D(inch)	Item No	D(mm)	Item No	D(mm)
SC-	1/4"	SC-	6mm	sc-	35mm
SC-	3/8"	SC-	8mm	sc-	38mm
SC-	1/2"	SC-	10mm	sc-	50mm
SC-	5/8"	SC-	12mm	sc-	54mm
SC-	3/4"	SC-	13mm	sc-	55mm
SC-	7/8"	SC-	15mm	sc-	60mm
SC-	1"	SC-	16mm	sc-	67mm
SC-	1-1/8"	SC-	19mm	sc-	70mm
SC-	1-1/4"	SC-	22mm	sc-	76mm
SC-	1-3/8"	SC-	25mm	sc-	80mm
SC-	1-1/2"	SC-	28mm	sc-	85mm
SC-	1-5/8"	SC-	32mm	sc-	89mm

Special sizes available request

REDUCING COUPLING

承口径内径弯头

Item No	A	B	Item No	A	B
RC-	1/2"x3/8"		RC-	1-1/8"x1/2"	
RC-	1/2"x1/4"		RC-	1-3/8"x7/8"	
RC-	5/8"x3/8"		RC-	1-3/8"x5/8"	
RC-	3/4"x5/8"		RC-	1-5/8"x1-3/8"	
RC-	3/4"x1/2"		RC-	1-5/8"x1-1/8"	
RC-	3/4"x3/8"		RC-	2-1/8"x1-5/8"	
RC-	7/8"x3/4"		RC-	2-1/8"x1-3/8"	
RC-	7/8"x5/8"		RC-	2-1/8"x1-1/8"	
RC-	7/8"x1/2"		RC-	2-5/8"x2-1/8"	
RC-	1-1/8"x3/4"		RC-	3-1/8"x2-5/8"	
RC-	1-1/8"x5/8"		RC-	3-1/8"x2-1/8"	

Special sizes available request



TEE


Item No	D(inch)	Item No	D(mm)	Item No	D(mm)
TE-	1/4"	TE-	6mm	TE-	35mm
TE-	3/8"	TE-	8mm	TE-	38mm
TE-	1/2"	TE-	10mm	TE-	50mm
TE-	5/8"	TE-	12mm	TE-	54mm
TE-	3/4"	TE-	13mm	TE-	55mm
TE-	7/8"	TE-	15mm	TE-	60mm
TE-	1"	TE-	16mm	TE-	67mm
TE-	1-1/8"	TE-	19mm	TE-	70mm
TE-	1-1/4"	TE-	22mm	TE-	76mm
TE-	1-3/8"	TE-	25mm	TE-	80mm
TE-	1-1/2"	TE-	28mm	TE-	85mm
TE-	1-5/8"	TE-	32mm	TE-	89mm

Special sizes available request



INFRARED THERMOMETERS WITH LASER

NO-CONTACT INFARAED THERMOMETER

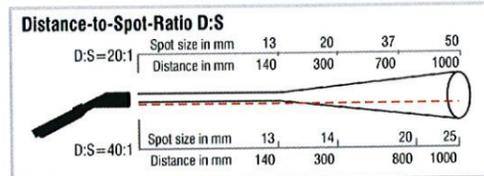

Item Number	OXY-32420MIS	OXY-32530MIS
Temperature range	-32°C to 420°C(-20°F to 788°F)	-32°C to 530°C(-20°F to 980°F)
System accuracy	± 1% or ± 1°C from 0°C to 420°C	± 1% or ± 1°C from 0°C to 530°C
Repeatability	± 0.5% or ± 0.7°C from 0°C to 420°C	± 0.5% or ± 0.7°C from 0°C to 530°C
Optical resolution(D:S)	20:1, 13 mm spot size in ≤ 140 mm	
Resolution(display)	0.2°C (0.5°F)	0.1°C (0.1°F)
Response time(95%)	30ms	
Ambient temperature	0°C to 50°C	
Storage temperature	-20°C to 60°C without battery	
Spectral range	8-14 μm	
Emissivity/Gain	fixed:0.95	0.100-1.500 adjustable
Configurations	Min/Max/Hold/°C/ °F	Min/Max/Hold/°C/ °F /Offset
Alam functions	-	Visual and acoustic HIGH-/LOW-alarm
PC Interface,Software, Thermocouple Input	-	
Laser	< 1mW laser class Iia,laser beam with 9 mm offset	
Weight/dimensions	150g, 190 X 38 X45 mm	
Battery	9 V alkaline battery	
Battery life	20 hours with laser and backlight on 50%	
	40 hours with laser and backlight off	
Relative humidity	10-95% RH non condensing,at <30°C ambient temperature	
Standard accessories	-	Soft pouch, wrist strap
Options	Calibration certificate	

FEATURES

A wide temperature range of -32 to 760 , laser aiming and optical resolution of up to 40:1 allow technicians to carry out accurate noncontact surface measurements for electrical and mechanical maintenance, HVAC checks , automotive testing and other applications , anywhere that temperature is a factor The Minisightplus enable you to measure objects as small as 13 mm , Just spot the object , press the trigger and the infrared thermometers will show the temperature results are shown in the display right away OFFSET and HOLD make measure-ments smart. Object emissivities can be adjusted even after the measurement was take

OXY-RDT13-1.5

1.5M Length of capillary tube 格测式温度计
RECTANGULAR DISTANCE-THERMOMETER

To be built into cabinets with capillary tube and sensing lead.
Measures on distance gases, Liquids, etc.
With short reaction time
Temperature range: -40°C up to +40°C
Scale dimension: 15X30mm
Built-in dimension: 26X58mm
Length of capillary tube: 1.5m adjustable



OXY-DT14

LED 数字温度计
DIGITAL LED DISPLAY THERMOMETER

-40 °C to + 70 °C
48" wires sensor
Thermometer works by solar power and with a easy replace battery to provide power once light lever decreased



SOLAR THERMOMETER

太阳能温度计

OXY-ST12-1.5 1.5m Length of capillary tube
OXY-ST12-3.0 3.0M Length of capillary tube
Available in two different diameters: 2" or 2.5"
Range: -50 F to -158 F(-40°C to +70°C)
PC lens, stainless steel frame with front flange
Switch button for F/C scale

THERMOMETER WITH CAPILLARY TUBE

毛细管温度计

OXY-TF11-1.5 1.5M Length of capillary tube
OXY-TF11-3.0 3.0M Length of capillary tube
Available in two different diameters: 2.5" or 4"
Universal design which can be mounted from the back or from the front.
RANGE:-40 UP TO +40°C



OXY-DT16

POCKET THERMOMETER

1" dial, 5" S.S
Stem with pocket clip case
temperature range: -40/70°C, -20/110°C,
0/250°C, -40/160 F, 0/220F



OXY-DT15

DIGITAL STICK THERMOMETER


The thermometer is equipped with F/C switch, data hold, protective cover and pocket clip.
-40 to 150°C
-40 to -300° F
Resolution: 0.1°C or F
Accuracy: +/- 2F or +/- 1°C




OXY-DT17

DIGITAL POCKET THERMOMETER

-58/302° F, -50/150°C switchable
1-1/4" dial, 5" S.S Stem with pocket clip case
2 push button (ON/OFF)
Battery Power Capacity Display
Normal Mode is 10 seconds per display
1 second update when hold button of "ON"



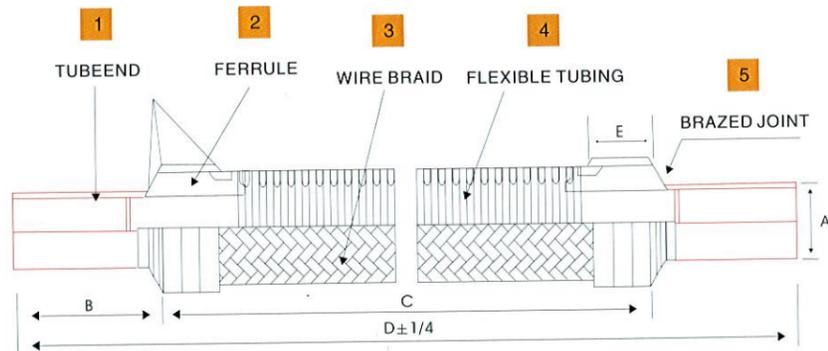

VIBRATION ABSORBER 避震管系列

MODEL NO.	NOMINAL SIZE(IN)	DIMENSION(MM)					MAX WORKING PRESSURE (PSIG)	BURST PRESSURE (PSIG)
		A (1.D)	B (±1/8)	C (±1/8)	D (±1/4)	E (±1/16)		
OXY-038VA	3/8"	3/8"	21	176	218	13	500	2500
OXY-012VA	1/2"	1/2"	22	184	228	13	500	2500
OXY-058VA	5/8"	5/8"	24	203	251	18	500	2500
OXY-034VA	3/4"	3/4"	32	204	268	18	500	2500
OXY-078VA	7/8"	7/8"	37	231	308	20	500	2500
OXY-118VA	1-1/8"	1-1/8"	46	239	331	20	500	2500
OXY-138VA	1-3/8"	1-3/8"	51	292	394	22	500	2500
OXY-158VA	1-5/8"	1-5/8"	57	317	428	24	500	2500
OXY-218VA	2-1/8"	2-1/8"	69	386	524	24	390	1950
OXY-258VA	2-5/8"	2-5/8"	79	458	617	32	340	1700
OXY-318VA	3-1/8"	3-1/8"	88	508	684	38	300	1500
OXY-358VA	3-5/8"	3-5/8"	104	610	818	40	175	525
OXY-418VA	4-1/8"	4-1/8"	113	610	836	40	175	525

CBB65 AC Motor Capacitors

μF	Round	Oval
Capacitance	φ DxH	la x Lb x H
3	φ40x55	52.5x32.5x55
4	φ40x55	52.5x32.5x55
5	φ40x55	52.5x32.5x55
6	φ40x55	52.5x32.5x55
7.5	φ40x55	52.5x32.5x55
10	φ40x65	52.5x32.5x65
12.5	φ45x65	52.5x32.5x75
15	φ45x65	52.5x32.5x75
17.5	φ45x75	52.5x32.5x85
20	φ45x75	70x45x65
25	φ45x85	70x45x75
30	φ50x85	70x45x85
35	φ50x100	70x45x85
40	φ50x100	70x45x100
45	φ55x100	70x45x100
50	φ55x100	70x45x115
55	φ55x115	70x45x115
60	φ55x115	70x45x135
65	φ60x115	70x45x135
70	φ60x130	70x45x150
75	φ60x150	90x48x115
80	φ60x150	90x48x115

Unit:mm

CBB65 AC MOTOR CAPACITORS
CBB65型系列/交流电动机电容器

Compact, High capacitance, Low losses, Protected, safe
Uses: Air-conditioner, Lighting




CBB61 AC Motor Capacitors

Capacitance	Rate Voltage 250V-500V.AC				
	250V.AC	300V.AC	350V.AC	400/450V.AC	500V.AC
1	32x19x10	32x19x10	36x18x9.5	32x22x12	37x22x12.5
1.5	32x19x10	36x18x9.5	36x22x11	37x24x13.5	38x25x15
2	32x19x10	36x22x11	36x24x12.5	38x27x15	38x28x17
2.5	32x22x12	36x22x12	37x26x13.5	38x28x17	38x31x19.5
3	32x22x12	36x24x13.5	38x27x16	38x29x18.5	47x31x17
3.5	36x22x12	37x26x13.5	38x28x17	38x31x19.5	48x31x18.5
4	36x22x12	39x27x15	38x29x18.5	47x31x17	47x33x19.5
4.5	37x24x13.5	38x27x16	38x31x19.5	48x31x18.5	48x32x23
5	37x24x13.5	38x28x17	47x31x17	47x33x19.5	48x35x22
5.5	38x25x15	38x29x18.5	47x31x17	48x33x20.5	48x37x24
6	38x25x15	38x29x18.5	48x31x18.5	48x32x23	48x37x26.5
6.5	38x27x15	38x31x19.5	47x33x19.5	48x35x22	48x37x26.5
7	38x27x16	47x31x17	47x33x19.5	48x37x24	48x40x28
8	38x28x17	47x31x17	48x32x23	48x37x26.5	58x38x26
9	38x29x18.5	48x31x18.5	47x35x23	48x40x28	59x40x28
10	38x31x19.5	47x33x19.5	48x37x24	58x38x26	58x43x32
11	47x31x17	48x32x23	48x37x26.5	58x38x26	58x43x32
12	47x31x17	48x35x22	48x40x28	59x40x28	58x43x32
13	48x31x18.5	48x35x22	48x40x2	58x43x32	69x52x38
14	47x31x18.5	48x37x24	58x38x26	58x43x32	69x52x38
15	47x33x19.5	48x37x24	59x40x28	58x43x32	69x52x38
16	48x33x20.5	48x37x26.5	59x40x28	58x43x32	69x52x38
18	48x35x22	48x40x28	58x43x32	69x52x38	69x52x38
20	48x37x24	50x43x30	58x43x32	69x52x38	69x52x38
25	48x37x26.5	59x40x28	69x52x38	69x52x38	69x52x38
30	58x38x28	58x43x32	69x52x38	69x52x38	69x52x38

Unit:mm

CBB61 AC MOTOR CAPACITORS
CBB61型系列/交流电动机电容器

Compact, High capacitance, Low losses, Low losses, Good self-healing, Protected, safe.
Uses: Electric fan, Oil-smoke exhaust

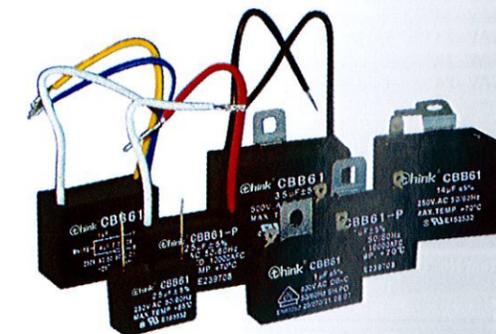

OIL SEPARATORS

油分离器

Item NO	Model No	Size CONN.
S-5200	S-5201S	1/2" ODS
	S-5201	1/2" ODS
	S-5202	5/8" ODS
	S-5203	7/8" ODS
	S-5204	1-1/8" ODS
S-5300	S-5205	1-3/8" ODS
	5302	1/2" ODS
	5303	5/8" ODS
	5304	7/8" ODS
	5305	1-1/8" ODS
S-6200	5306	1-3/8" ODS
	5307	1-5/8" ODS
	6202	1-1/8" ODS
	6203	1-3/8" ODS
	6204	1-5/8" ODS
S-6300	6205	2-1/8" ODS
	6302	1-1/8" ODS
	6303	1-3/8" ODS
	6304	1-5/8" ODS
	6305	2-1/8" ODS



REFRIGERANT RECEIVERS

储液器

Item No	Connections	Size(Inches)
CR-101	3/8	1/4
CR-102	3/8	3/8
CR-103	3/8	3/8
CR-104	1/2	1/2
CR-105	5/8	5/8
CR-106	3/4	3/4
CR-107	7/8	7/8



HEAT EXCHANGER

热交换器

Item No	DIA(Inches)	Length(Inches)	Suction line L.D.	Liquid line L.D.
SAV-2404	4	7	1/2	3/8
SAV-2405	4	10-5/8	5/8	3/8
SAV-2406	5-1/2	10	3/4	1/2
SAV-2407	5-1/2	13	7/8	1/2
SAV-2411	6-1/2	14	1-1/8	5/8
SAV-2413	6-3/4	20	1-3/8	3/4
SAV-2415	6-3/4	24	1-5/8	7/8



REPLACEABLE CORE TYPE DRIERS

干燥过滤筒

Item No	Connection Type	Qty of Core	Item No	Connection Type	Qty of Core
CD-1005	5/8"	1	CD-2015	1-5/8"	2
CD-1007	7/8"	1	CD-2012	2-1/8"	2
CD-1011	1-1/8"	1	CD-3011	1-1/8"	3
CD-1013	1-3/8"	1	CD-3013	1-3/8"	3
CD-1015	1-5/8"	1	CD-3015	1-5/8"	3
CD-1021	2-1/8"	1	CD-3021	2-1/8"	3
CD-2007	7/8"	2	CD-4011	1-1/8"	4
CD-2011	1-1/8"	2	CD-4013	1-3/8"	4
CD-2013	1-3/8"	2	CD-4015	1-5/8"	4
			CD-4021	2-1/8"	4



REFRIGERANT ACCUMULATOR

液分离器

Model NO	Size Conv. ODE	B Inches Length	A Inches Length
RA-204	1/2	8	4
RA-205	5/8	10-5/8	4
RA-206	3/4	9	5-1/2
RA-207	7/8	12	5-1/2
RA-208	1-1/8	15	6-1/2
RA-209	1-3/8	20	6-1/2
RA-210	1-5/8	22	6-1/2
RA-221	2-1/8	29	8-5/8



LIQUID LINE FILTER-DRIERS 分子筛式干燥过滤器

Item NO (Flare)	Item NO (Solder)	Connection Size(Inches)	Length (Inches)	Diameter Of Body(Inches)
OXY-052	OXY-052S	1/4	4-13/16	2-5/8
OXY-083	OXY-083S	3/8	5-15/16	2-5/8
OXY-164	OXY-164S	1/2	7-1/16	2-5/8
OXY-165	OXY-165S	5/8	7-1/2	2-5/8

Charged With Molecular sieve



Flare Type



Solder Type

LIQUID LINE FILTER-DRIERS 块状式干燥过滤器

Item NO (Flare)	Item NO (Solder)	Connection Size(Inches)	Length (Inches)	Diameter Of Body(Inches)
OXY-052K	OXY-052KS	1/4	4-13/16	2-5/8
OXY-083K	OXY-083KS	3/8	5-15/16	2-5/8
OXY-164K	OXY-164KS	1/2	7-1/16	2-5/8
OXY-165K	OXY-165KS	5/8	7-1/2	2-5/8


Charged With Liquid Line Blocks

SERIES OF FILTER DRIER CORES 干燥过滤芯

Contrast to the traditional capacity, it dehydrates a deep degree and has a smooth, clean outward appearance, which can ensure the refrigerant system to work properly. The product can bear high pressure and vibration and have remarkable penetrability, low flow resistance, which can ensure the refrigerant system with low pressure drop.

Special sizes are available on request.


Item NO	Dimensions(Inches)		
	Inner DIA.	Outer DIA	Len
HY-48A	1.73	3.63	5.43
	Water capacity at 24°C		
	R134A	R22	404A
	548	602	620

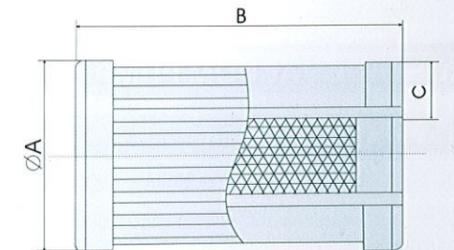

SUCTION LINE FILTER DRIER CORES 干燥过滤芯

型号 (TYPE)	A(in)	B(in)	C(in)	备注
FX-48	3.74	Φ5.51	Φ0.79	百褶纸 (balayuse paper)
FX-100	4.69	Φ6.54	Φ1.10	百褶纸 (balayuse paper)

DUAL STAGE VACUUM PUMP 双极真空泵

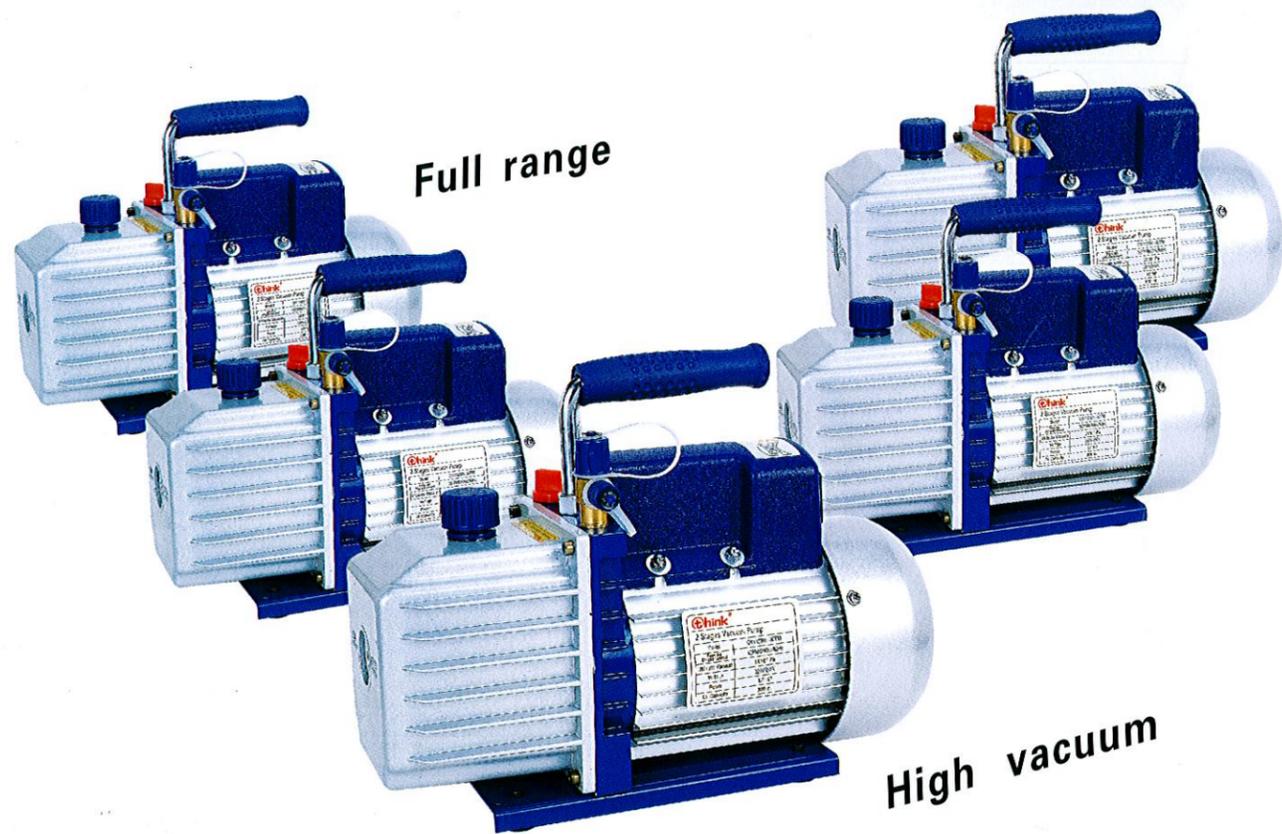

DUAL STAGE VACUUM PUMP 双极真空泵

Technical data	Model	Model	Model	Model
	OXY-215201-2CFM	OXY-25301-3CFM	OXY-25501-5CFM	OXY-215801-8CFM
Capacity	50L/min	71L/min	118L/min	226L/min
Number of stages	2	2	2	2
Intake fittings	1/4SAE-3/8SEA	1/4SAE-3/8SEA	1/4SAE-3/8SEA	1/4SAE-3/8SEA
Oil capacity	200ml	300ml	500ml	708ml
Power Supply	1/4HP	1/3HP	1/2HP	3/4HP
Motor Size	220/240V 50Hz/60Hz	220/240V 50Hz/60Hz	220/240V 50Hz/60Hz	220/240V 50Hz/60Hz
Weight	7.5kg	8.6kg	11.2kg	16.5kg
Dimensions	308x124x230mm	315x124x240	335x138x250	400x145x270

RECOVERY & CHARGING EQUIPMENT 冷媒回收机



OXY-RCE12HP

FEATURES:

- Recovery station, suitable for all refrigerants including R410A
- High performance oil-less compressor 1/2 HP
- Sturdy construction
- Automatic recovery of liquid and vapor refrigerants
- 550 psi High pressure safety "cut-off" switch
- Safety high pressure Cut-off Switch
- Fully reinforced hard plastic casing

SPECIFICATIONS:

APPLICATION	Residential A/C, Refrigeration, Commercial		
COMPRESSOR	1/2 HP Oil-less, Air cooled		
Motor speed	1450RPM@50hz		
VOLTAGE	220V-240VAC, 50hz	110v-120VAC, 60hz	
		Category III	Category IV
Recovery Rate	Vapor	0.23kg/min	0.25kg/min
	Liquid	1.57kg/min	1.81kg/min
	Push/pull	4.64kg/min	5.57kg/min
Operation Temp.	0 C-40 C		
Dimensions	500mm(L)*220mm(W)*340mm(H)		
WEIGHT	16kg		



think[®]
鼎美

永壹制冷配件(马来西亚)有限公司

OXY-ONE
REFRIGERATION PRODUCTS CO., LTD.

[Http://www.oxyone.net](http://www.oxyone.net)

[Http://www.think-tools.cn](http://www.think-tools.cn)